ICON
TECHNOLOGY



10 years on the market

PRODUCT CATALOGUE 2021

LED lighting | **STREET** poles | **LED AUTO** light | **PARK & GARDEN** fixtures

LED LIGHTING — 3-86 pages

PARK & GARDEN FIXTURES — 87-100 pages

INSECT KILLER LIGHTING EQUIPMENT — 101-102 pages

STREET POLES — 103-106 pages

LED AUTO LIGHTS — 107-114 pages

OCLYTE™ 2R® OCTAGONAL POLE

GALAXY

Member of CISQ Federation

RINA

ISO 9001
ISO 14001
BS OHSAS 18001
Certified Integrated Systems

Weight, size and dimensions may vary according to the individual product and its features. Illustrations, dimensions and colors are intended as a general guide and the colors are reproduced as accurately as the printing process allows. Specifications, models and colors are subject to change without notice, as 2R Bulgaria as supplier is constantly improving it's products. ICON Technology Kft is not responsible for typographical, photographical or printing errors.
All rights reserved. 2R Bulgaria 2020

mystock.hu

Questions and orders:

ICON TECHNOLOGY KFT.
1152 BUDAPEST, SZENTMIHÁLYI ÚT 171.
+36 1 501 3450 • info@nvc-ce.com

LED LIGHTING SECTIONS



LED LAMP 4-8


FILAMENT LAMP 9-11


LED LAMP 12-13


LED LAMP 14-15


LED TUBE 16


LED TYRE 17


LED PANEL SLIM 18-21


NEOLUX 19


NLBLED 405, NLED 491 E PLUS PRO SMD 22-24


E PLUS PRO IP65 25


LED LINEAR LIGHT 26-27


LED TRUNKING LIGHT 28



LED BATTEN 29-30


LED DOWNLIGHT 31-32


LED DOWNLIGHT 33-34


LED DOWNLIGHT 35-36


LED DOWNLIGHT 37


LED DOWNLIGHT 38


LED DOWNLIGHT 39-40


LED DOWNLIGHT 41-46


LED STAIR LIGHT 42


LED FLOODLIGHTS 47-49


LED FLOODLIGHTS 50


LED HIGH BAY 51-53


LED STREET LIGHT 54-57



LED SOLAR SYSTEM 58-59


SECURITY LIGHT 60


LED WALL LIGHT 61



LED WALL LAMP 62-63


LED WALL LAMP 64



EMERGENCY LIGHT 65-66


LED WALL WASHER 66


LED UNDERGROUND 67


LED TRACK LIGHT 68-69


LED TRACK LIGHT 70-72



TRACK LINES 71


LED CEILING 73-77


LED STRIP LIGHT 78-80


CONNECTOR, PROFILE 81


LED TRANSFOMER, LED CONTROLLER 82-84


NEON LED STT 85


ACCESSORIES 86

LED R50A

R50A E14



2 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens	Kelvin
71872	LED R50A E14	6W	470	3000K
73845	LED R50A E14	6W	480	4000K
86661	LED R50A E14	6W	490	6500K

CLASSIFICATION

15000hrs | A+ | IP20 | Beam Angle 120° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type Alum+PC

BOX 200 pcs

DIMENSIONS



LED CAP GLOBE

E14



2 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens	Kelvin
82328	LED CAP GLOBE E14	8W	640	3000K
82342	LED CAP GLOBE E14	8W	640	4000K
82366	LED CAP GLOBE E14	8W	640	6000K

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 180° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+PC

BOX 100 pcs

DIMENSIONS



LED CAP CANDLE

E14



2 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens	Kelvin
01572	LED CAP CANDLE E14	5.5W	460	3000K
01596	LED CAP CANDLE E14	5.5W	470	4000K
18495	LED CAP CANDLE E14	5.5W	480	6500K
31272	LED CAP CANDLE E14	8W	640	3000K
31289	LED CAP CANDLE E14	8W	640	4000K
31296	LED CAP CANDLE E14	8W	640	6000K

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 180° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+PC

BOX 5.5w-200pcs 8w-100pcs

DIMENSIONS



LED CAP CANDLE DIMMABLE

E14



DIMMABLE

2 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens	Kelvin
86685	LED CAP CANDLE E14 DIMM	6W	470	3000K
86692	LED CAP CANDLE E14 DIMM	6W	480	4000K
86678	LED CAP CANDLE E14 DIMM	6W	490	6500K

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 180° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+PC

DIMMABLE BOX 200 pcs

DIMENSIONS



LED CAP GLOBE
G45 E27

2 YEARS WARRANTY




SKU	Model	EQ. Watts	Lumens	Kelvin
19010	LED CAP GLOBE G45 E27	5.5W	460	3000K
19027	LED CAP GLOBE G45 E27	5.5W	470	4000K
19034	LED CAP GLOBE G45 E27	5.5W	490	6500K

CLASSIFICATION

15000hrs | A+ | IP20 | Beam Angle 180° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+PC

BOX 100 pcs

DIMENSIONS



LED CAP GLOBE
A50 E27

2 YEARS WARRANTY




SKU	Model	EQ. Watts	Lumens	Kelvin
00971	LED CAP GLOBE A50 E27	3W	230	3000K
00995	LED CAP GLOBE A50 E27	3W	230	4000K
18983	LED CAP GLOBE A50 E27	3W	230	6000K

CLASSIFICATION

15000hrs | A+ | IP20 | Beam Angle 270° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+PC

BOX 100 pcs

DIMENSIONS



LED CAP GLOBE
A60 E27

2 YEARS WARRANTY




SKU	Model	EQ. Watts	Lumens	Kelvin
00896	LED CAP GLOBE A60 E27	7W	600	3000K
00919	LED CAP GLOBE A60 E27	7W	610	4000K
19119	LED CAP GLOBE A60 E27	7W	630	6500K
01015	LED CAP GLOBE A60 E27	10W	800	3000K
01039	LED CAP GLOBE A60 E27	10W	820	4000K
18877	LED CAP GLOBE A60 E27	10W	850	6500K
00933	LED CAP GLOBE A60 E27	12W	1050	3000K
00957	LED CAP GLOBE A60 E27	12W	1100	4000K
18884	LED CAP GLOBE A60 E27	12W	1150	6500K
86708	LED CAP GLOBE A60 E27	15W	1100	3000K
86715	LED CAP GLOBE A60 E27	15W	1150	4000K
86722	LED CAP GLOBE A60 E27	15W	1200	6500K

CLASSIFICATION

25000hrs | A+ | IP20 | Beam Angle 200° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+PC

BOX 100 pcs

DIMENSIONS



LED CAP GLOBE
A60 E27
4pcs SET





3 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens	Kelvin
12639	LED CAP GLOBE A60 E27	12W	1080	3000K
12653	LED CAP GLOBE A60 E27	12W	1080	4000K
12677	LED CAP GLOBE A60 E27	12W	1080	6500K

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 240° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+PC

BOX 20 set

DIMENSIONS



LED CAP GLOBE DIMMABLE
A60 E27



2 YEARS WARRANTY

DIMMABLE

SKU	Model	EQ. Watts	Lumens	Kelvin
86739	LED CAP GLOBE A60 E27 DIMM	10W	800	3000K
86746	LED CAP GLOBE A60 E27 DIMM	10W	830	4000K
86753	LED CAP GLOBE A60 E27 DIMM	10W	850	6500K

CLASSIFICATION

25000hrs | A+ | IP20 | Beam Angle 200° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+PC

DIMMABLE BOX 100 pcs

DIMENSIONS



LED CAP GLOBE
G95 E27



2 YEARS WARRANTY

DIMMABLE

SKU	Model	EQ. Watts	Lumens	Kelvin
82885	LED CAP GLOBE G95 E27	15W	1200	3000K
36543	LED CAP GLOBE G95 E27	15W	1200	4000K
82908	LED CAP GLOBE G95 E27	15W	1200	6000K

CLASSIFICATION

25000hrs | A+ | IP20 | Beam Angle 270° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+PC

BOX 50 pcs

DIMENSIONS



LED CAP GLOBE
T80 E27



2 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens	Kelvin
19287	LED CAP GLOBE T80 E27	20W	1700	3000K
19294	LED CAP GLOBE T80 E27	20W	1750	4000K
19300	LED CAP GLOBE T80 E27	20W	1800	6500K

CLASSIFICATION

25000hrs | A+ | IP20 | Beam Angle 160° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+PC

BOX 50 pcs

DIMENSIONS



LED CAP GLOBE
T110 E27



2 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens	Kelvin
19225	LED CAP GLOBE T110 E27	35W	2800	4000K
86760	LED CAP GLOBE T110 E27	35W	3000	6500K
19232	LED CAP GLOBE T110 E27	45W	3500	3000K
19249	LED CAP GLOBE T110 E27	45W	3600	4000K
19256	LED CAP GLOBE T110 E27	45W	3800	6500K
86777	LED CAP GLOBE T110 E27	60W	4600	4000K
19263	LED CAP GLOBE T110 E27	60W	5000	6500K
86784	LED CAP GLOBE T110 E27	80W	6600	4000K
19270	LED CAP GLOBE T110 E27	80W	6700	6500K

CLASSIFICATION

25000hrs | A+ | IP20 | Beam Angle 160° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+PC

BOX 20 pcs

DIMENSIONS



LED CORN
E27



CORN E27
15W

CORN E27
30W


CLASSIFICATION



BOX CORN 15W 100 set

BOX CORN 30W 50 set

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin
03163	LED CORN E27	15W	1500	4500K
07239	LED CORN E27	30W	3000	4500K

LED FILAMENT MATT
T10 E27




CLASSIFICATION



BOX pcs

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin
86791	LED FILAMENT T10 MATT	8W	960	2700K

LED FILAMENT
C35 E14

2 YEARS WARRANTY




SKU	Model	EQ. Watts	Lumens	Kelvin
20443	LED FILAMENT C35	2W	180	2700K
01558	LED FILAMENT C35	4W	360	2700K

CLASSIFICATION

15000hrs | A+ | IP20 | Beam Angle 300° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+Glass

BOX 200 pcs

DIMENSIONS



LED FILAMENT FLAME
BT35 E14

2 YEARS WARRANTY




SKU	Model	EQ. Watts	Lumens	Kelvin
03453	LED FILAMENT BT35 Flame	2W	160	2700K
01534	LED FILAMENT BT35 Flame	4W	320	2700K

CLASSIFICATION

15000hrs | A+ | IP20 | Beam Angle 300° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+Glass

BOX 200 pcs

DIMENSIONS



LED FILAMENT
A60 E27

2 YEARS WARRANTY




SKU	Model	EQ. Watts	Lumens	Kelvin
03125	LED FILAMENT A60	4W	360	2700K
03149	LED FILAMENT A60	6W	600	2700K

CLASSIFICATION

15000hrs | A+ | IP20 | Beam Angle 300° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+Glass

BOX 100 pcs

DIMENSIONS



LED FILAMENT DIMMABLE
A60 E27

2 YEARS WARRANTY

DIMMABLE




SKU	Model	EQ. Watts	Lumens	Kelvin
86807	LED FILAMENT A60 DIMM	7W	630	2700K

CLASSIFICATION

15000hrs | A+ | IP20 | Beam Angle 300° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+Glass

DIMMABLE | BOX 100 pcs

DIMENSIONS



LED FILAMENT
ST64 E27



2 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens	Kelvin
03101	LED FILAMENT ST64	4W	360	2700K
86814	LED FILAMENT ST64 smoke	4W	360	2700K
86821	LED FILAMENT ST64	7W	630	2700K

CLASSIFICATION

15000hrs | A+ | IP20 | Beam Angle 300° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+Glass

BOX 100 pcs

DIMENSIONS



LED FILAMENT DIMMABLE
ST64 E27



2 YEARS WARRANTY

DIMMABLE


SKU	Model	EQ. Watts	Lumens	Kelvin
86838	LED FILAMENT ST64 DIMM	4W	360	2700K

CLASSIFICATION

15000hrs | A+ | IP20 | Beam Angle 300° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+Glass

DIMMABLE | BOX 100 pcs

DIMENSIONS



LED FILAMENT
G80 E27



2 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens	Kelvin
03088	LED FILAMENT G80	4W	470	2700K

CLASSIFICATION

15000hrs | A+ | IP20 | Beam Angle 300° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+Glass

BOX 100 pcs

DIMENSIONS



LED FILAMENT
G95 E27

2 YEARS WARRANTY




SKU	Model	EQ. Watts	Lumens	Kelvin
20511	LED FILAMENT G95	4W	470	2700K
20641	LED FILAMENT G95	7W	800	2700K

CLASSIFICATION

25000hrs | A+ | IP20 | Beam Angle 300° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+Glass

BOX 50 pcs

DIMENSIONS



LED FILAMENT DIMMABLE
G95 E27

DIMMABLE

SKU	Model	EQ. Watts	Lumens	Kelvin
86845	LED FILAMENT G95 DIMM	4W	470	2700K

LED FILAMENT
G125 E27

2 YEARS WARRANTY




SKU	Model	EQ. Watts	Lumens	Kelvin
20634	LED FILAMENT G125	7W	800	2700K

CLASSIFICATION

25000hrs | A+ | IP20 | Beam Angle 300° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+Glass

BOX 50 pcs

DIMENSIONS



LED FILAMENT DIMMABLE
G125 E27

DIMMABLE

SKU	Model	EQ. Watts	Lumens	Kelvin
86852	LED FILAMENT G125 DIMM	7W	800	2700K


LED CAP COB G4
12V G4






SKU	Model	EQ. Watts	Lumens	Kelvin
19317	LED CAP COB G4	2W	200	3000K
19324	LED CAP COB G4	2W	200	4000K

CLASSIFICATION




BOX
1000 pcs

DIMENSIONS




LED CAP COB G4
12V G4






SKU	Model	EQ. Watts	Lumens	Kelvin
19416	LED CAP COB G4	4W	360	3000K
19423	LED CAP COB G4	4W	360	4000K

CLASSIFICATION



BOX
1000 pcs

DIMENSIONS



LED CAP COB G4
230V G4






SKU	Model	EQ. Watts	Lumens	Kelvin
19393	LED CAP COB G4	2W	220	3000K
19409	LED CAP COB G4	2W	220	4000K

CLASSIFICATION



BOX
1000 pcs

DIMENSIONS




LED CAP G9
230V G9

2 YEARS WARRANTY




SKU	Model	EQ. Watts	Lumens	Kelvin
19577	LED CAP G9	4W	360	3000K
19584	LED CAP G9	4W	360	4000K

CLASSIFICATION



BOX 1000 pcs

DIMENSIONS




LED CAP G9
230V G9

2 YEARS WARRANTY




SKU	Model	EQ. Watts	Lumens	Kelvin
19553	LED CAP G9	6W	480	3000K
19560	LED CAP G9	6W	480	4000K

CLASSIFICATION



BOX 1000 pcs

DIMENSIONS




LED CAP G9
230V G9

2 YEARS WARRANTY




SKU	Model	EQ. Watts	Lumens	Kelvin
19492	LED CAP G9	10W	800	3000K
19508	LED CAP G9	10W	800	4000K

CLASSIFICATION



BOX 1000 pcs

DIMENSIONS



LED MR16
230V MR16




2 YEARS WARRANTY

CLASSIFICATION

25000hrs | A+ | IP20 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Plastic + AL

BOX 100 pcs

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin
13636	LED MR16	3W	240	4000K
82922	LED MR16	5W	400	3000K
13650	LED MR16	5W	400	4000K
82946	LED MR16	5W	400	6000K
82960	LED MR16	7W	560	3000K
13674	LED MR16	7W	560	4000K
82984	LED MR16	7W	560	6000K

LED MR16
12V MR16




2 YEARS WARRANTY

CLASSIFICATION

25000hrs | A+ | IP20 | Beam Angle 100° | CRI ≥80 | PF >0.5 | Voltage DC12V | Body Type Plastic + AL

BOX 200 pcs

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin
19966	LED MR16 Frost	6W	500	3000K
19973	LED MR16 Frost	6W	510	4000K

LED GU10
230V GU10




2 YEARS WARRANTY

CLASSIFICATION

25000hrs | A+ | IP20 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Plastic + AL

BOX 100 pcs

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin
60869	LED GU10	5W	400	3000K
85695	LED GU10	5W	400	4000K
85718	LED GU10	5W	400	6000K
83028	LED GU10	7W	560	3000K
13612	LED GU10	7W	560	4000K
83004	LED GU10	7W	560	6000K

LED GU10 230V DIMMABLE
GU10



2 YEARS WARRANTY


DIMMABLE

CLASSIFICATION

25000hrs | A+ | IP20 | Beam Angle 38° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Plastic + AL

DIMMABLE | BOX 100 pcs

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin
19799	LED 230V DIMM GU10	5.5W	400	4000K
87149	LED 230V DIMM GU10	6.5W	500	3000K
19829	LED 230V DIMM GU10	6.5W	500	4000K

LED TUBE SINGLE END

T8



3 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Kelvin	A x B mm
01213	LED Tube T8 L600 Single end	9W	900	4000K	602 × 30
01237	LED Tube T8 L600 Single end	9W	900	6500K	602 × 30
01251	LED Tube T8 L1200 Single end	18W	1800	4000K	1212 × 30
01275	LED Tube T8 L1200 Single end	18W	1800	6500K	1212 × 30
01299	LED Tube T8 L1500 Single end	26W	2400	4000K	1512 × 30
01312	LED Tube T8 L1500 Single end	26W	2400	6500K	1512 × 30

Connection method
Single End




CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 270° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type Glass

BOX 9W 25pcs | BOX 18W 25pcs | BOX 26W 20pcs

DIMENSIONS



LED TUBE DOUBLE END


T8



3 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Kelvin	A x B mm
01091	LED Tube T8 L600 Double end	9W	900	4000K	602 × 30
01114	LED Tube T8 L600 Double end	9W	900	6500K	602 × 30
01138	LED Tube T8 L1200 Double end	18W	1800	4000K	1212 × 30
01152	LED Tube T8 L1200 Double end	18W	1800	6500K	1212 × 30
01176	LED Tube T8 L1500 Double end	26W	2400	4000K	1512 × 30
01190	LED Tube T8 L1500 Double end	26W	2400	6500K	1512 × 30

Connection method
Double End




CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 270° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type Glass

BOX 9W 25pcs | BOX 18W 25pcs | BOX 26W 20pcs


DIMENSIONS



LED TYRE

T5





2 YEARS WARRANTY


CLASSIFICATION



BOX 20pcs

SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
28777	LED Tyre T5 L300	4W	400	3000K	309 × 22.8 × 38.5
28784	LED Tyre T5 L300	4W	400	5000K	309 × 22.8 × 38.5
28814	LED Tyre T5 L600	8W	800	3000K	570 × 22.8 × 38.5
28821	LED Tyre T5 L600	8W	800	5000K	570 × 22.8 × 38.5
28692	LED Tyre T5 L900	10W	1000	3000K	870 × 22.8 × 38.5
28715	LED Tyre T5 L900	10W	1000	5000K	870 × 22.8 × 38.5
28739	LED Tyre T5 L1200	14W	1400	3000K	1170 × 22.8 × 38.5
28753	LED Tyre T5 L1200	14W	1400	5000K	1170 × 22.8 × 38.5


DIMENSIONS



LED TYRE WITH SWITCH

T5





2 YEARS WARRANTY


CLASSIFICATION



BOX 20pcs

SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
28890	LED Tyre T5 L300 with switch	4W	400	5000K	310 x 22.5 x 36.5
28913	LED Tyre T5 L600 with switch	8W	800	5000K	571 x 22.5 x 36.5
28951	LED Tyre T5 L900 with switch	10W	1000	5000K	871 x 22.5 x 36.5
28869	LED Tyre T5 L1200 with switch	14W	1400	5000K	1171 x 22.5 x 36.5

DIMENSIONS



LED PANEL FAIRY SLIM


600 × 600 mm
625 × 625 mm


UGR<19

microprismatic diffuser
limiting dazzle

3 YEARS WARRANTY











PHOTOMETRIC DATA



CLASSIFICATION

50000hrs | A+ | IP44 | Beam Angle 120° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type AL+PMMA | BOX 10 pcs | UGR <19

DIMENSIONS



LED PANEL FAIRY SLIM 600×600mm

SKU	Model	EQ. Watts	Lumens	Kelvin	A x B mm
11403	LED panel FAIRY SLIM	40W	4400	4000 K	595×595×8
13759	Frame OM 600x600x55mm Metal FIX				613×613×58
15623	Frame OM 600x600x45mm Alu				605×605×50
24335	Hanging set				
86876	LED Emergency unit				

LED PANEL FAIRY SLIM 625×625mm

SKU	Model	EQ. Watts	Lumens	Kelvin	A x B mm
86883	LED panel FAIRY SLIM	40W	4400	4000 K	625×625×8
24335	Hanging set				

LED PANEL CAPRI SLIM
300 × 600 mm







SKU	Model	EQ. Watts	Lumens	Kelvin	A x B mm
14008	LED panel CAPRI SLIM	20W	1800	3000 K	295×595×8
12288	LED panel CAPRI SLIM	20W	1800	4000 K	295×595×8
12295	LED panel CAPRI SLIM	20W	1800	6500 K	295×595×8
13766	Frame OM 300x600x55mm Metal FIX				320×620×65
86869	Frame OM 300x600x45mm Alu				320×620×65
24335	Hanging set				
86876	LED Emergency unit				

50000hrs | A+ | IP44 | Beam Angle 120° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type PC


BOX 10 pcs

LED PANEL CAPRI SLIM
300 × 1200 mm



SKU	Model	EQ. Watts	Lumens	Kelvin	A x B mm
13933	LED panel CAPRI SLIM	40W	3600	3000 K	295×1195×8
12240	LED panel CAPRI SLIM	40W	3600	4000 K	295×1195×8
12257	LED panel CAPRI SLIM	40W	3600	6500 K	295×1195×8
13773	Frame OM 300x1200x55mm Metal FIX				320×1220×65
87019	Frame OM 300x1200x45mm Alu				320×1220×65
24335	Hanging set				
86876	LED Emergency unit				


DIMENSIONS



CLASSIFICATION

Voltage AC230V | IP20 | BOX 2 pcs

DIMENSIONS



NEOLUX FOR LED TUBE
VG/OM

SKU	Model	A × B × C mm
09998	4xT8 LED 600mm Double end VG	595×595×80
31210	2xT8 LED 600mm Double end VG	295×595×80
23741	2xT8 LED 1200mm Double end VG	295×1195×80
10024	4xT8 LED 600mm Double end OM	610×610×75
31227	2xT8 LED 600mm Double end OM	310×610×75
13506	2xT8 LED 1200mm Double end OM	310×1220×75



Note: LED tubes are not included in price.
VG - recessed mounting; OM - surface mounting

LED PANEL CAPRI SLIM

600×600 mm
40W


2 YEARS WARRANTY







PHOTOMETRIC DATA




CLASSIFICATION

50000hrs | A+ | IP44 | Beam Angle 120° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type AL+PC

BOX 10 pcs

DIMENSIONS




SKU	Model	EQ. Watts	Lumens	Kelvin	A x B ×C mm
13926	LED panel CAPRI SLIM	40W	3600	3000 K	595×595×9
24793	LED panel CAPRI SLIM	40W	3600	4000 K	595×595×9
24816	LED panel CAPRI SLIM	40W	3600	6500 K	595×595×9
13759	Frame OM 600x600x55mm Metal FIX				613×613×58
15623	Frame OM 600x600x45mm Alu				605×605×50
24335	Hanging set				
86876	LED Emergency unit				

LED PANEL CAPRI SLIM

600×600 mm
48W

PHOTOMETRIC DATA



3 YEARS WARRANTY








CLASSIFICATION

50000 hrs | A+ | IP44 | Beam Angle 120° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type AL+PMMA

BOX 10 pcs

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin	A x B ×C mm
24755	LED panel CAPRI SLIM	48W	4500	3000 K	595×595×9
13957	LED panel CAPRI SLIM	48W	4500	4000 K	595×595×9
13964	LED panel CAPRI SLIM	48W	4500	6500 K	595×595×9
13759	Frame OM 600x600x55mm Metal FIX				613×613×58
15623	Frame OM 600x600x45mm Alu				605×605×50
24335	Hanging set				
86876	LED Emergency unit				

LED PANEL CAPRI SLIM DIMMABLE

600×600 mm

3 YEARS WARRANTY


DIMMABLE








PHOTOMETRIC DATA




CLASSIFICATION



SKU	Model	EQ. Watts	Lumens	Kelvin	A x B mm
13971	LED panel CAPRI SLIM DIMM	48W	4500	3000 K	595×595×9
13988	LED panel CAPRI SLIM DIMM	48W	4500	4000 K	595×595×9
13995	LED panel CAPRI SLIM DIMM	48W	4500	6500 K	595×595×9
13759	Frame OM 600x600x55mm Metal FIX				613×613×58
15623	Frame OM 600x600x45mm Alu				605×605×50
24335	Hanging set				
86876	LED Emergency unit				


DIMENSIONS



LED PANEL ACCESSORIES



Frame OM Metal FIX



Frame OM Alu

SKU	Model	A x B × C mm
13759	Frame OM 600x600x55mm Metal FIX	613×613×58
15623	Frame OM 600x600x45mm Alu	605×605×50
13766	Frame OM 300x600x55mm Metal FIX	320×620×65
86869	Frame OM 300x600x45mm Alu	320×620×65
13773	Frame OM 300x1200x55mm Metal FIX	320×1220x65
87019	Frame OM 300x1200x45mm Alu	320×1220x62
24335	Hanging set	
86876	LED Emergency unit	



Hanging set

NLBLED 405 SMD






CLASSIFICATION


30000hrs | A+ | IP65 | Beam Angle 105° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type PC/PC


BOX 12/15 pcs

DIMENSIONS



PHOTOMETRIC DATA



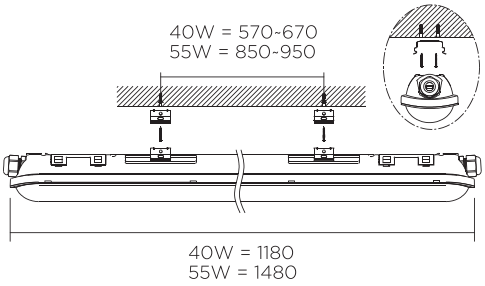

SKU	Model	EQ. Watts	Lumens	Kelvin	A × B × C mm
52468	NLBLED405 SMD 40W 4000K	40W	3600	4000K	1180x72x65
52469	NLBLED405 SMD 55W 4000K	55W	4800	4000K	1480x72x65
52470	NLBLED405 SMD 55W 6500K	55W	4800	6500K	1480x72x65

NLED 491 SMD




CLASSIFICATION

30000hrs | A+ | IP65 | Beam Angle 120° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type PC/PC

BOX 8 pcs

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin	A × B × C mm
10955	NLED 491 SMD 18W 3000K	18W	1600	3000K	650x85x110
11151	NLED 491 SMD 18W 4000K	18W	1600	4000K	650x85x110

E PLUS SUPER PRO SMD

130 lm/W







BRIDGELUX

CLASSIFICATION

50000hrs | A++ | IP65 | Beam Angle 120° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type PC/PC


BOX 1 pcs

Light TOP QUALITY PRODUCTS BY 2R


TOP QUALITY PRODUCTS 2R WARRANTY

5 YEARS WARRANTY

PHOTOMETRIC DATA



DIMENSIONS



DIMMING OPTION 0-10V

SKU	Model	EQ. Watts	Lumens	Kelvin	A × B × C mm
83431	E Plus Super Pro SMD	20W	2600	4000K	600×104×80
83455	E Plus Super Pro SMD	20W	2600	6000K	600×104×80
83479	E Plus Super Pro SMD	40W	5200	4000K	1200×104×80
83493	E Plus Super Pro SMD	40W	5200	6000K	1200×104×80
83516	E Plus Super Pro SMD	60W	7800	4000K	1500×104×80
83530	E Plus Super Pro SMD	60W	7800	6000K	1500×104×80
83554	E Plus Super Pro SMD	75W	9750	4000K	1500×104×80
83578	E Plus Super Pro SMD	75W	9750	6000K	1500×104×80
86876	LED Emergency unit				

E PLUS PRO SMD

120 lm/W







BRIDGELUX

3 YEARS WARRANTY

CLASSIFICATION


50000hrs | A++ | IP65 | Beam Angle 120°

CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type PC/PC


BOX 20/40/50W 8 pcs

BOX 60/75W 6 pcs

PHOTOMETRIC DATA



DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin	A × B × C mm
04405	E Plus Pro SMD	20W	2400	4000K	600x104x80
04412	E Plus Pro SMD	20W	2400	6000K	600x104x80
04245	E Plus Pro SMD	40W	4800	4000K	1200x104x80
04252	E Plus Pro SMD	40W	4800	6000K	1200x104x80
04320	E Plus Pro SMD	60W	7200	4000K	1500x104x80
04337	E Plus Pro SMD	60W	7200	6000K	1500x104x80
86876	LED Emergency unit				

E PLUS PRO WATERPROOF BATTEN for Single End
IP65



Note:
SE - Single End.
LED Tubes are NOT included in the price.
The Watterproof lightnig fixture made for SE T8 LED Tubes.

SKU	Model	pcs in Box	A × B × C mm
24229	E Plus Pro 1xL600 LED Tube T8 SE	10	660 × 80 × 90
24267	E Plus Pro 2xL600 LED Tube T8 SE	6	660 × 133 × 90
24199	E Plus Pro 1xL1200 LED Tube T8 SE	8	1270 × 85 × 95
24236	E Plus Pro 2xL1200 LED Tube T8 SE	6	1270 × 135 × 95
24205	E Plus Pro 1xL1500 LED Tube T8 SE	8	1570 × 110 × 100
24243	E Plus Pro 2xL1500 LED Tube T8 SE	4	1570 × 160 × 100


Connection method
Single End



CLASSIFICATION



DIMENSIONS




E PLUS PRO WATERPROOF BATTEN for Double End
IP65



Note:
DE - Double End.
LED Tubes are NOT included in the price.
The Watterproof lightnig fixture made for SE T8 LED Tubes.

SKU	Model	pcs in Box	A × B × C mm
12806	E Plus Pro 1xL600 LED Tube T8 DE	10	660 × 80 × 90
12707	E Plus Pro 2xL600 LED Tube T8 DE	6	660 × 133 × 90
12721	E Plus Pro 1xL1200 LED Tube T8 DE	8	1270 × 85 × 95
12745	E Plus Pro 2xL1200 LED Tube T8 DE	6	1270 × 135 × 95
12783	E Plus Pro 1xL1500 LED Tube T8 DE	8	1570 × 110 × 100
12769	E Plus Pro 2xL1500 LED Tube T8 DE	4	1570 × 160 × 100


Connection method
Double End




CLASSIFICATION




DIMENSIONS




LED LIGHT SONATA 40W

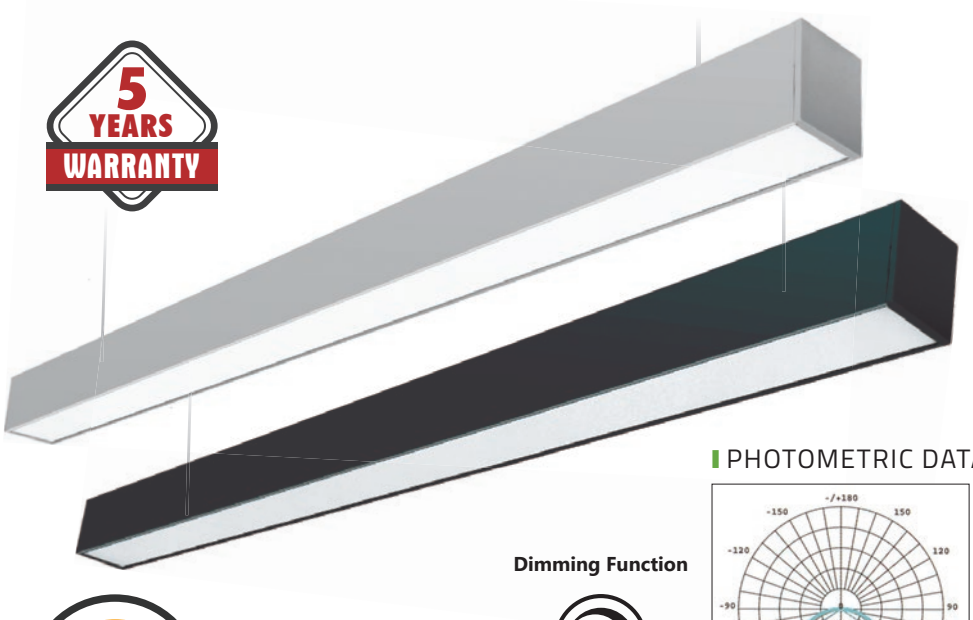


Metal connector


Hanging set is included in the price

PHOTOMETRIC DATA



Dimming Function



TRIAC option
0-10V option




CLASSIFICATION





10 pcs


DIMENSIONS




SKU	Model	EQ. Watts	Lumens	Kelvin	A × B × C mm
36529	LED Light SONATA silver	40W	4300	3000K	1217 × 64 × 75
15241	LED Light SONATA silver	40W	4300	4000K	1217 × 64 × 75
85183	LED Light SONATA black	40W	4300	3000K	1217 × 64 × 75
85176	LED Light SONATA black	40W	4300	4000K	1217 × 64 × 75
24328	Metal connector for Sonata 180°				

LED LINEAR LIGHT NAVI 6623





PHOTOMETRIC DATA






CLASSIFICATION





1 pcs

DIMENSIONS




SKU	Model	EQ. Watts	Lumens	Kelvin	A × B × C mm
21266	LED Linear Light Navi 6623	60W	6600	4000K	1230 × 130 × 70
21273	LED Linear Light Navi 6623	60W	6600	6000K	1230 × 130 × 70
21242	LED Linear Light Navi 6623	120W	13000	4000K	2430 × 160 × 70
21259	LED Linear Light Navi 6623	120W	13000	6000K	2430 × 160 × 70
24335	Hanging set				

LED LINEAR LIGHT NAVI 6620




2 YEARS WARRANTY

PHOTOMETRIC DATA



SKU	Model	EQ. Watts	Lumens	Kelvin	A × B × C mm
21204	LED Linear Light Navi 6620	40W	4400	4000K	1230×130×70
21211	LED Linear Light Navi 6620	40W	4400	6000K	1230×130×70
21228	LED Linear Light Navi 6620	80W	8800	4000K	2430×160×70
21235	LED Linear Light Navi 6620	80W	8800	6000K	2430×160×70
24335	Hanging set				






CLASSIFICATION



BOX
1 pcs

DIMENSIONS




LED LINEAR LIGHT NAVI 6618

2 YEARS WARRANTY



PHOTOMETRIC DATA



SKU	Model	EQ. Watts	Lumens	Kelvin	A × B × C mm
21167	LED Linear Light Navi 6618	40W	6600	4000K	1230×130×70
21174	LED Linear Light Navi 6618	40W	6600	6000K	1230×130×70
21181	LED Linear Light Navi 6618	80W	8800	4000K	2430×160×70
21198	LED Linear Light Navi 6618	80W	8800	6000K	2430×160×70
60531	Clips set				




CLASSIFICATION



BOX
1 pcs


DIMENSIONS





LED PAM TRUNK

150 lm/W









7 Core system

Standard and dimming function OR standard and emergency function

We can run

Maximum 80 meters of continued luminaire under 230V AC
with 60W 1424mm luminaires each.
Maximum 65 meters of continued luminaire under 230V AC
with 80W 1424mm luminaires each.

1 pcs MASTER INCLUDES: body, caps, 2 pcs hanging wires, connectors
1 pcs FOLLOW INCLUDES: body, 2 pcs hanging wires

1.5M



The DALI or 0-10V dimming - Ask for offer

SKU	Model	EQ. Watts	Lumens	Kelvin	A × B × C mm
9915289	LED PAM MASTER 60W DA	60W	9000	4000K	1424×68×42.5
9815326	LED PAM FOLLOW 60W DA	60W	9000	4000K	1424×68×42.5
15289	LED PAM MASTER 60W 90DEG	60W	9000	4000K	1424×68×42.5
9815289	LED PAM MASTER 60W 120DEG	60W	9000	4000K	1424×68×42.5
9915326	LED PAM FOLLOW 60W 120DEG	60W	9000	4000K	1424×68×42.5
9915326	LED PAM FOLLOW 60W 120DEG	60W	9000	4000K	1424×68×42.5
9815302	LED PAM MASTER 80W DA	80W	12000	4000K	1424×68×42.5
9815340	LED PAM FOLLOW 80W DA	80W	12000	4000K	1424×68×42.5
15302	LED PAM MASTER 80W 90DEG	80W	12000	4000K	1424×68×42.5
15340	LED PAM FOLLOW 80W 90DEG	80W	12000	4000K	1424×68×42.5
9915302	LED PAM MASTER 80W 120DEG	80W	12000	4000K	1424×68×42.5
9915340	LED PAM FOLLOW 80W 120DEG	80W	12000	4000K	1424×68×42.5
15401	LED PAM Trunk L node				
15425	LED PAM Trunk T node				

BEAM ANGLE

DIMMING FUNCTION




option - DALI
option - 1-10V

CLASSIFICATION



DIMENSIONS



LED BATTEN GALY SLIM

IP44






CLASSIFICATION

30000hrs | A+ | IP44 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+PS

BOX 20 pcs

DIMENSIONS





SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
34808	LED Batten GALY SLIM L600	18W	1800	4500K	605×75×25
35003	LED Batten GALY SLIM L1200	36W	3600	4500K	1215×75×25

LED BATTEN TYRE FSL

IP21








CLASSIFICATION

30000hrs | A+ | IP21 | Beam Angle 270° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+PS

BOX 20 pcs

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
29019	LED Batten TYRE FSL L600	9W	900	4000K	620×30×40
28999	LED Batten TYRE FSL L1200	18W	1800	4000K	1230×30×40
29002	LED Batten TYRE FSL L1500	26W	2600	4000K	1530×30×40

LED BATTEN TYRE CLASSIC

FOR LED TUBE T8
IP21



Note:
SE - Single End
DE – Double end
LED Tubes are NOT included in the price
Lighting fixture made for T8 LED Tubes

SKU	Model	A × B × C mm
31234	Tyre Classic 1xL1200 T8 LED Tube SE	1230×50×65
85978	Tyre Classic 2xL1200 T8 LED Tube SE	1230×100×65
85992	Tyre Classic 1xL1500 T8 LED Tube SE	1530×50×65
86012	Tyre Classic 2xL1500 T8 LED Tube SE	1530×100×65
85961	Tyre Classic 1xL1200 T8 LED Tube DE	1230×50×65
85985	Tyre Classic 2xL1200 T8 LED Tube DE	1230×100×65
86005	Tyre Classic 1xL1500 T8 LED Tube DE	1530×50×65
86029	Tyre Classic 2xL1500 T8 LED Tube DE	1530×100×65


CLASSIFICATION

A+ | IP21 | Voltage AC230V | Body Type Metal

BOX 1xL-18pcs

BOX 2xL-9pcs

DIMENSIONS



LED BATTEN TYRE S

FOR LED TUBE T8
IP21



Note:
SE - Single End
DE – Double end
LED Tubes are NOT included in the price
Lighting fixture made for T8 LED tubes


SKU	Model	A × B × C mm
86036	Tyre S 1xL1200 T8 LED Tube SE	1230x115x70
86050	Tyre S 2xL1200 T8 LED Tube SE	1230x150x70
86074	Tyre S 1xL1500 T8 LED Tube SE	1530x100x70
86098	Tyre S 2xL1500 T8 LED Tube SE	1530x160x70
86043	Tyre S 1xL1200 T8 LED Tube DE	1230x115x70
86067	Tyre S 2xL1200 T8 LED Tube DE	1230x150x70
86081	Tyre S 1xL1500 T8 LED Tube DE	1530x100x70
86104	Tyre S 2xL1500 T8 LED Tube DE	1530x160x70

CLASSIFICATION

A+ | IP21 | Voltage AC230V | Body Type Metal

BOX 20pcs

DIMENSIONS



LED DOWNLIGHT WAVE

3-WHITE




3in1

THREE LIGHT COLOR CHOICE
ONE CEILING LAMP






CLASSIFICATION





BOX 7W 60pcs
BOX 10/14/17W 40 pcs
BOX 25W 20pcs

DIMENSIONS



PHOTOMETRIC DATA





3 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Cut out mm	A × B mm
11441	LED Downlight WAVE R70	7W	660/700/700	68-80	95 × 58
11465	LED Downlight WAVE R92	10W	950/1000/1000	90-102	113 × 59
11489	LED Downlight WAVE R130	14W	1330/1400/1400	120-130	145 × 66
11502	LED Downlight WAVE R150	17W	1600/1700/1700	145-155	174 × 69
11526	LED Downlight WAVE R205	25W	2400/2500/2500	195-210	244 × 85

Dimmable

SKU	Model	EQ. Watts	Lumens	Cut out mm	A × B mm
36611	LED Downlight WAVE R70 DIMM	7W	660/700/700	68-80	95 × 58
36635	LED Downlight WAVE R92 DIMM	10W	950/1000/1000	90-102	113 × 59
36482	LED Downlight WAVE R150 DIMM	17W	1600/1700/1700	145-155	174 × 69
36505	LED Downlight WAVE R205 DIMM	25W	2400/2500/2500	195-210	244 × 85

DIMMING FUNCTION



TRIAC

Cover INOX for WAVE

SKU	Model	Dimensions
23383	Cover INOX for WAVE R92 10W	Ø 113
23369	Cover INOX for WAVE R150 17W	Ø 174
23376	Cover INOX for WAVE R205 25W	Ø 244



LED DOWNLIGHT CYCLONE

3-WHITE

3in1


THREE LIGHT COLOR CHOICE
ONE CEILING LAMP








CLASSIFICATION





5 YEARS WARRANTY

DIMENSIONS



PHOTOMETRIC DATA





DIMMING FUNCTION

TRIAC
0-10V option

SKU	Model	EQ. Watts	Lumens	Cut out mm	A × B mm
11540	LED Downlight CYCLONE R168	20W	1600/1800/1800	168-178	200 × 68
11564	LED Downlight CYCLONE R192	30W	2700/3000/3000	192-210	230 × 75
11588	LED Downlight CYCLONE R240	40W	3600/3900/3900	240-255	279 × 94

Dimmable

SKU	Model	EQ. Watts	Dimmable	Cut out mm	A × B mm
15814	LED Downlight CYCLONE R168 DIMM	20W	TRIAC	168-178	200 × 68
15852	LED Downlight CYCLONE R192 DIMM	30W	TRIAC	192-210	230 × 75


LED PANEL CAPRI R
BACK LIGHT








h45mm - 6W, 12W, 18W




h25mm - 3W, 24W, 30W

PHOTOMETRIC DATA




3 YEARS WARRANTY

CLASSIFICATION



SKU	Model	EQ. Watts	Lumens	Kelvin	Cut out mm	A × B mm
13001	LED Panel CAPRI R95	3W	300	3000K	Ø 85	Ø 95×25
04023	LED Panel CAPRI R95	3W	300	4500K	Ø 85	Ø 95×25
09349	LED Panel CAPRI R95	3W	300	6000K	Ø 85	Ø 95×25
13025	LED Panel CAPRI R110	6W	600	3000K	Ø 98	Ø 110×45
01916	LED Panel CAPRI R110	6W	600	4500K	Ø 98	Ø 110×45
09363	LED Panel CAPRI R110	6W	600	6000K	Ø 98	Ø 110×45
13049	LED Panel CAPRI R150	12W	1200	3000K	Ø 138	Ø 150×45
09387	LED Panel CAPRI R150	12W	1200	4500K	Ø 138	Ø 150×45
09400	LED Panel CAPRI R150	12W	1200	6000K	Ø 138	Ø 150×45
13063	LED Panel CAPRI R180	18W	1800	3000K	Ø 160	Ø 175×45
09424	LED Panel CAPRI R180	18W	1800	4500K	Ø 160	Ø 175×45
09448	LED Panel CAPRI R180	18W	1800	6000K	Ø 160	Ø 175×45
13087	LED Panel CAPRI R180	24W	2400	3000K	Ø 160	Ø 175×25
09462	LED Panel CAPRI R180	24W	2400	4500K	Ø 160	Ø 175×25
09486	LED Panel CAPRI R180	24W	2400	6000K	Ø 160	Ø 175×25
14657	LED Panel CAPRI R225	30W	3000	3000K	Ø 205	Ø 225×25
09509	LED Panel CAPRI R225	30W	3000	4500K	Ø 205	Ø 225×25
23499	LED Panel CAPRI R225	30W	3000	6000K	Ø 205	Ø 225×25


DIMENSIONS



LED PANEL CAPRI S


BACK LIGHT








h45mm - 6W, 12W, 18W



h25mm - 3W, 24W, 30W

PHOTOMETRIC DATA




3 YEARS WARRANTY

CLASSIFICATION

50000hrs | A+ | IP44 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type AL/PC | BOX 20pcs | BOX 3W 50pcs | Rectangular monting hole | Kelvin 3000K 4500K 6000K

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin	Cut out mm	A × B mm
23635	LED Panel CAPRI S95	3W	240	3000K	73×73	80×80×25
01954	LED Panel CAPRI S95	3W	240	4500K	73×73	80×80×25
23642	LED Panel CAPRI S95	3W	240	6000K	73×73	80×80×25
13100	LED Panel CAPRI S110	6W	600	3000K	95×95	110×110×45
01978	LED Panel CAPRI S110	6W	600	4500K	95×95	110×110×45
09523	LED Panel CAPRI S110	6W	600	6000K	95×95	110×110×45
13124	LED Panel CAPRI S150	12W	1200	3000K	135×135	150×150×45
09547	LED Panel CAPRI S150	12W	1200	4500K	135×135	150×150×45
09561	LED Panel CAPRI S150	12W	1200	6000K	135×135	150×150×45
13148	LED Panel CAPRI S180	18W	1800	3000K	160×160	175×175×45
09585	LED Panel CAPRI S180	18W	1800	4500K	160×160	175×175×45
09608	LED Panel CAPRI S180	18W	1800	6000K	160×160	175×175×45
13162	LED Panel CAPRI S180	24W	2400	3000K	160×160	175×175×25
03712	LED Panel CAPRI S180	24W	2400	4500K	160×160	175×175×25
09622	LED Panel CAPRI S180	24W	2400	6000K	160×160	175×175×25
14695	LED Panel CAPRI S225	30W	3000	3000K	205×205	225×225×25
12387	LED Panel CAPRI S225	30W	3000	4500K	205×205	225×225×25
14718	LED Panel CAPRI S225	30W	3000	6000K	205×205	225×225×25


LED DOWNLIGHTS CAPRI GLASS R

BACK LIGHT






CLASSIFICATION




PHOTOMETRIC DATA



3 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Cut out mm	A × B mm
09707	LED Downlight CAPRI Glass R	6W	600	Ø 96	Ø 130 × 32
22539	LED Downlight CAPRI Glass R	12W	1200	Ø 136	Ø 165 × 50
22546	LED Downlight CAPRI Glass R	18W	1800	Ø 157	Ø 185 × 50

DIMENSIONS




LED DOWNLIGHTS CAPRI GLASS S

BACK LIGHT






CLASSIFICATION




PHOTOMETRIC DATA



3 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Cut out mm	A × B × C mm
09721	LED Downlight CAPRI Glass S	6W	600	95 × 95	130×130×32
09745	LED Downlight CAPRI Glass S	12W	1200	135 × 135	165×165×50
09769	LED Downlight CAPRI Glass S	18W	1800	160 × 160	190×190×50


DIMENSIONS



LED PANEL FSL 1106 R
SIDE LIGHT




PHOTOMETRIC DATA




2 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Kelvin	Cut out mm	A × B mm
22980	LED Panel FSL 1106 R 3W	3W	170	3000K	Ø 75	Ø 84 x 30
22973	LED Panel FSL 1106 R 3W	3W	170	4000K	Ø 75	Ø 84 x 30
22997	LED Panel FSL 1106 R 6W	6W	420	3000K	Ø 110	Ø 119 x 11
22928	LED Panel FSL 1106 R 6W	6W	420	4000K	Ø 110	Ø 119 x 11
22942	LED Panel FSL 1106 R 12W	12W	850	3000K	Ø 160	Ø 173 x 11
22935	LED Panel FSL 1106 R 12W	12W	850	4000K	Ø 160	Ø 173 x 11
22966	LED Panel FSL 1106 R 18W	18W	1400	3000K	Ø 215	Ø 223 x 11
22959	LED Panel FSL 1106 R 18W	18W	1400	4000K	Ø 215	Ø 223 x 11

CLASSIFICATION




DIMENSIONS



LED PANEL FSL 1106 S
SIDE LIGHT




PHOTOMETRIC DATA




2 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Kelvin	Cut out mm	A × B × C mm
23055	LED Panel FSL 1106 S 3W	3W	170	3000K	75×75	85×85×30
23048	LED Panel FSL 1106 S 3W	3W	170	4000K	75×75	85×85×30
23079	LED Panel FSL 1106 S 6W	6W	420	3000K	110×110	120×120×11
23062	LED Panel FSL 1106 S 6W	6W	420	4000K	110×110	120×120×11
23017	LED Panel FSL 1106 S 12W	12W	850	3000K	160×160	172×172×11
23000	LED Panel FSL 1106 S 12W	12W	850	4000K	160×160	172×172×11
23031	LED Panel FSL 1106 S 18W	18W	1400	3000K	210×210	225×225×11
23024	LED Panel FSL 1106 S 18W	18W	1400	4000K	210×210	225×225×11

CLASSIFICATION




DIMENSIONS



LED MULTI SIDE LIGHT

SIDE LIGHT






2 YEARS WARRANTY

CLASSIFICATION

30000hrs | A+ | IP21 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type AL/PC | Kelvin 4000K | Circular monting hole

BOX 6/8W 100pcs | BOX 15W 40pcs | BOX 20W 20pcs

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Cut out mm	A × B mm
12554	LED Multi Side Light 6W	6W	570	50-100	Ø 100×20
12578	LED Multi Side Light 8W	8W	760	50-100	Ø 115×20
12592	LED Multi Side Light 15W	15W	1425	50-160	Ø 175×20
12615	LED Multi Side Light 20W	20W	1900	50-200	Ø 230×20

LED DOWNLIGHTS HILUX FTS




HILUX FTS 5W Wh R



HILUX FTS 5W Wh S


2 YEARS WARRANTY



CLASSIFICATION


50000hrs | A+ | IP21 | Beam Angle 60° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type AL/PC | BOX 60 pcs | Kelvin 4500K | Circular monting hole

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Cut out mm	A × B mm
23178	LED Downlights HILUX FTS R	5W	500	Ø 75	Ø 85x55
23192	LED Downlights HILUX FTS S	5W	500	Ø 75	92x92x55

LED DOWNLIGHT ANGEL EYE NY


2 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Cut out mm	A × B × C mm
87026	ANGEL EYE NY R03 black	3W	270	Ø 28	Ø 35×25
78963	ANGEL EYE NY R03 white	3W	270	Ø 28	Ø 35×25
87033	ANGEL EYE NY S04 black	3W	270	Ø 28	35×35×25
78970	ANGEL EYE NY S04 white	3W	270	Ø 28	35×35×25

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 30° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type AL/PC | Kelvin 4000K | Circular monting hole | BOX 200 pcs

DIMENSIONS



LED DOWNLIGHT ANGEL EYE R/S



2 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens	Cut out mm	A × B × C mm
14596	ANGEL EYE R03 black	3W	270	Ø 50	Ø 55x27
14572	ANGEL EYE R03 white	3W	270	Ø 50	Ø 55x27
14633	ANGEL EYE S04 black	3W	270	Ø 50	55x55x27
14619	ANGEL EYE S04 white	3W	270	Ø 50	55x55x27

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 30° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type AL/PC | Kelvin 4000K | Circular monting hole | BOX 200 pcs

DIMENSIONS



LED DOWNLIGHT ANGEL EYE SP



2 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Cut out mm	A × B × C mm
07093	ANGEL EYE SP03 3W	3W	270	Ø 36	46×46×28

CLASSIFICATION

20000hrs | A+ | IP20 | Beam Angle 100° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type AL/PC | Kelvin 4000K | Circular monting hole | BOX 100 pcs

DIMENSIONS




LED DOWNLIGHT FSL DELUX R

BACK LIGHT
SURFACE MOUNTING




2 YEARS WARRANTY

CLASSIFICATION



DIMENSIONS




SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
87040	LED Downlight FSL DELUX R206 12W OM	12W	900	3000K	Ø 121×57
22867	LED Downlight FSL DELUX R206 12W OM	12W	900	4000K	Ø 121×57
87057	LED Downlight FSL DELUX R206 18W OM	18W	1350	3000K	Ø 181×57
22874	LED Downlight FSL DELUX R206 18W OM	18W	1350	4000K	Ø 181×57
87064	LED Downlight FSL DELUX R206 24W OM	24W	1800	3000K	Ø 221×57
22881	LED Downlight FSL DELUX R206 24W OM	24W	1800	4000K	Ø 221×57

LED DOWNLIGHT FSL DELUX S


BACK LIGHT
SURFACE MOUNTING






2 YEARS WARRANTY

CLASSIFICATION



DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin	A × B × C mm
87071	LED Downlight FSL DELUX S106 12W OM	12W	900	3000K	122×122×57
22898	LED Downlight FSL DELUX S106 12W OM	12W	900	4000K	122×122×57
87088	LED Downlight FSL DELUX S106 18W OM	18W	1350	3000K	182×182×57
22904	LED Downlight FSL DELUX S106 18W OM	18W	1350	4000K	182×182×57
87095	LED Downlight FSL DELUX S106 24W OM	24W	1800	3000K	222×222×57
22911	LED Downlight FSL DELUX S106 24W OM	24W	1800	4000K	222×222×57


LED DOWNLIGHT CAPRI R OM

BACK LIGHT
SURFACE MOUNTING




3 YEARS WARRANTY

CLASSIFICATION



DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
87101	LED Downlight CAPRI R225 20W OM	20W	2400	3000K	Ø 225x35
10932	LED Downlight CAPRI R225 20W OM	20W	2400	4500K	Ø 225x35
87118	LED Downlight CAPRI R300 30W OM	30W	3000	3000K	Ø 300x45
09646	LED Downlight CAPRI R300 30W OM	30W	3000	4500K	Ø 300x45


LED DOWNLIGHT CAPRI S OM

BACK LIGHT
SURFACE MOUNTING




3 YEARS WARRANTY

CLASSIFICATION



DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin	A × B × C mm
87125	LED Downlight CAPRI S180 20W OM	20W	2400	3000K	225×225×35
09660	LED Downlight CAPRI S180 20W OM	20W	2400	4500K	225×225×35
87132	LED Downlight CAPRI S300 30W OM	30W	3000	3000K	300×300×45
09684	LED Downlight CAPRI S300 30W OM	30W	3000	4500K	300×300×45

LED DOWNLIGHT R1605 OM
SURFACE MOUNTING




3 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	A × B mm
37311	LED Downlight R1605 7W white	7W	700	Ø 80 × 55
37328	LED Downlight R1605 7W black	7W	700	Ø 80 × 55
37373	LED Downlight R1605 12W white	12W	1200	Ø 97 × 70
37359	LED Downlight R1605 12W black	12W	1200	Ø 97 × 70

CLASSIFICATION

50000hrs | A+ | IP44 | Beam Angle 60° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type Alum | BOX 7W 50pcs | BOX 12W 30pcs | Kelvin 4000K | Flicker-Free

DIMENSIONS



LED DOWNLIGHT S1605 OM
SURFACE MOUNTING




3 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	A × B × C mm
37335	LED Downlight S1605 7W white	7W	700	80×80×58
37342	LED Downlight S1605 7W black	7W	700	80×80×58
37380	LED Downlight S1605 12W white	12W	1200	97×97×70
37366	LED Downlight S1605 12W black	12W	1200	97×97×70

CLASSIFICATION

50000hrs | A+ | IP44 | Beam Angle 60° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type Alum | BOX 7W 50pcs | BOX 12W 30pcs | Kelvin 4000K | Flicker-Free

DIMENSIONS



LED STAIR LIGHT
RECESSED MOUNTING

2 YEARS WARRANTY



LED Stair Light IP20




LED Stair Light IP65

SKU	Model	EQ. Watts	Lumens	Cut out mm	A × B × C mm
14534	LED Stair Light IP20 white	2W	160	86 x 86	90×90×43
14558	LED Stair Light IP65 black	2W	160	74 x 74	85×85×453

CLASSIFICATION

30000hrs | A+ | IP20 | IP65 | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+PC | Beam Angle 50° | Rectangular monting hole | Kelvin 4000K | BOX 50 pcs

DIMENSIONS



LED STAIR LIGHT
RECESSED MOUNTING

2 YEARS WARRANTY




LED Stair Light 08 | LED Stair Light 09 | LED Stair Light 06 | LED Stair Light 04

SKU	Model	EQ. Watts	Lumens	Cut out mm	A × B × C mm
37274	LED Stair Light 08 3W	3W	300	Ø50	60×60×53,5
37281	LED Stair Light 09 3W	3W	300	Ø50	60×60×53,5
37298	LED Stair Light 06 3W	3W	300	Ø50	60×60×53,5
37304	LED Stair Light 04 3W	3W	300	Ø50	Ø 60 × 58,5

CLASSIFICATION

30000hrs | A+ | IP65 | Beam Angle 24° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum+PC | Kelvin 4000K | Rectangular monting hole | Flicker-Free | BOX 100 pcs

DIMENSIONS



LED STAIR LIGHT QJ
RECESSED MOUNTING

2 YEARS WARRANTY




SKU	Model	EQ. Watts	Lumens	Cut out mm	A × B × C mm
07086	LED Stair Light QJ IP65	3W	240	100×38	110×45×45

CLASSIFICATION


30000hrs | A+ | IP65 | Beam Angle 100° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type AL+Glass | Rectangular monting hole | Kelvin 4000K | BOX 50 pcs

DIMENSIONS



NLED 119*D
SPOT DOWNLIGHT


PHOTOMETRIC DATA






SKU	Model	EQ. Watts	Lumens	Kelvin	Cut out mm	A × B mm
42780	NLED 1193D 3.5W 3000K 24°	3.5W	263	3000 K	Ø 75	Ø 93×56
42784	NLED 1195D 5W 3000K 24°	5W	375	3000 K	Ø 75	Ø 93×56
42792	NLED 1199D 10W 3000K 24°	10W	750	3000 K	Ø 95	Ø 116×66

CLASSIFICATION




DIMENSIONS



NLED 12*D
SPOT DOWNLIGHT

PHOTOMETRIC DATA









SKU	Model	EQ. Watts	Lumens	Kelvin	Cut out mm	A × B mm
10887	NLED 123D 7W 3000K 24°	7W	263	3000 K	Ø 75	Ø 85×52
11173	NLED 124D 9W 4000K 38°	9W	375	3000 K	Ø 95	Ø 109×60
11174	NLED 125D 15W 4000K 38°	15W	750	3000 K	Ø 120	Ø 138×70

CLASSIFICATION



DIMENSIONS



NLED 13*D
SPOT DOWNLIGHT



NLED 135D




NLED 137D




NLED 139D

SKU	Model	EQ. Watts	Lumens	Kelvin	Cut out mm	A × B mm
10893	NLED 135D 7W 3000K 30°	7W	320	3000 K	Ø 95	Ø 106×50
10894	NLED 137D 9W 3000K 30°	9W	420	3000 K	Ø 95	Ø 106×54
10895	NLED 139D 12W 3000K 30°	15W	520	3000 K	Ø 120	Ø 130×59

CLASSIFICATION



DIMENSIONS




NLED 14*D
SPOT DOWNLIGHT



NLED 143D | NLED 145D | NLED 149D

SKU	Model	EQ. Watts	Lumens	Kelvin	Cut out mm	A × B mm
10896	NLED 143D 4W 3000K 30°	4W	175	3000 K	Ø 75	Ø 85×45
10897	NLED 145D 7W 3000K 30°	7W	320	3000 K	Ø 95	Ø 106×47
10899	NLED 149D 12W 3000K 30°	12W	540	3000 K	Ø 120	Ø 130×54

CLASSIFICATION
30000hrs | A+ | IP20 | Beam Angle 30° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type AL/PC | Kelvin 3000K | Circular monting hole | BOX 36 pcs


DIMENSIONS


NLED 19*D
SPOT DOWNLIGHT



SKU	Model	EQ. Watts	Lumens	Kelvin	Cut out mm	A × B mm
10904	NLED 191D 4W 3000K 24° G	4W	260	3000 K	Ø 75	Ø 82×42
10905	NLED 191D 6W 3000K 24° G	6W	400	3000 K	Ø 75	Ø 82×42
10902	NLED 192D 9W 3000K 24° S	9W	600	3000 K	Ø 95	Ø 106×52.5
10906	NLED 192D 9W 3000K 24° G	9W	600	3000 K	Ø 95	Ø 106×52.5
10903	NLED 192D 12W 3000K 24° S	12W	800	3000 K	Ø 95	Ø 106×52.5
10907	NLED 192D 12W 3000K 24F G	12W	800	3000 K	Ø 95	Ø 106×52.5

CLASSIFICATION
30000hrs | A+ | IP20 | Beam Angle 24° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type AL/PC | Kelvin 3000K | Circular monting hole | BOX 36 pcs

DIMENSIONS



NLED 201*D
SLIM DOWNLIGHT

2 YEARS WARRANTY



SKU	Model	EQ. Watts	Lumens	Kelvin	Cut out mm	A × B mm
12206	NLED 2014 6W 3000K	6W	350	3000 K	Ø 105	Ø 19×120
12207	NLED 2014 6W 4000K	6W	380	4000 K	Ø 105	Ø 19×120
11445	NLED 2016 12W 3000K	12W	800	3000 K	Ø 157	Ø 19×172
11446	NLED 2018 18W 3000K	18W	1350	3000 K	Ø 210	Ø 19×225


CLASSIFICATION
30000hrs | A+ | IP20 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type AL/PC | Kelvin 3000K 4000K | Circular monting hole | BOX 24/30/60 pcs

DIMENSIONS



NLED 930*
SLIM DOWNLIGHT




PHOTOMETRIC DATA



CLASSIFICATION



DIMENSIONS




SKU	Model	EQ. Watts	Lumens	Kelvin	Cut out mm	A × B mm
14522	NLED 9304 9W 4000K	9W	630	4000 K	Ø 98	Ø 110×28
14982	NLED 9306 20W 3000K	20W	1400	3000 K	Ø 157	Ø 180×28
14523	NLED 9306 20W 4000K	20W	1400	4000 K	Ø 157	Ø 180×28

NLED 950*
SPECIAL DOWNLIGHT







PHOTOMETRIC DATA



CLASSIFICATION



DIMENSIONS




SKU	Model	EQ. Watts	Lumens	Kelvin	Cut out mm	A × B mm
14991	NLED 9503 5W 3000K	5W	425	3000 K	Ø 68-80	Ø 95×58
14992	NLED 9505 14W 3000K	14W	1260	3000 K	Ø 174-69	Ø 188×59
14518	NLED 9505 14W 4000K	14W	1260	4000 K	Ø 174-69	Ø 188×59
14993	NLED 9508 25W 3000K	25W	2450	3000 K	Ø 244-85	Ø 188×59
14519	NLED 9508 25W 4000K	25W	2450	4000 K	Ø 244-85	Ø 188×59

NLED 602
GIMBAL DOWNLIGHT


2 YEARS WARRANTY





OPTIONAL: available with OSRAM DALI LED driver


PHOTOMETRIC DATA



CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 20° 40°
CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type AL/PC
Kelvin 3000K 4000K | Circular monting hole | BOX 8 pcs

DIMENSIONS




SKU	Model	EQ. Watts	Lumens	Kelvin	Cut out mm	A × B mm
11709	NLED602 40W 3000K 20°	40W	3325	3000 K	Ø 170	Ø 188×59
11711	NLED602 40W 4000K 20°	40W	3325	4000 K	Ø 170	Ø 188×59
11712	NLED602 40W 4000K 40°	40W	3325	4000 K	Ø 170	Ø 188×59


NLEDM 910*
SURFACE MOUNTED DOWNLIGHT

2 YEARS WARRANTY






PHOTOMETRIC DATA



CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 60°
CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type AL/PC
Kelvin 3000K 4000K | BOX 18/24/30 pcs

DIMENSIONS




SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
10887	NLEDM 9104 10W 4000K 60°	10W	800	4000 K	Ø 90×120
11173	NLEDM 9105 20W 4000K 60°	20W	1600	4000 K	Ø 114×109
11174	NLEDM 9106 30W 4000K 60°	30W	2400	4000 K	Ø 149×154

LED FLOODLIGHTS DECO BLACK
10-50W









TOSHIBA
Leading Innovation
LED chips inside

PHOTOMETRIC DATA


SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
05570	LED Floodlight DECO 10W	10W	1100	2700K	110×90
05587	LED Floodlight DECO 10W	10W	1100	6000K	110×90
05617	LED Floodlight DECO 20W	20W	2200	2700K	140×120
05624	LED Floodlight DECO 20W	20W	2200	6000K	140×120
05655	LED Floodlight DECO 30W	30W	3300	2700K	170×150
82847	LED Floodlight DECO 30W	30W	3300	4000K	170×150
05662	LED Floodlight DECO 30W	30W	3300	6000K	170×150
05693	LED Floodlight DECO 50W	50W	5500	2700K	210×180
82861	LED Floodlight DECO 50W	50W	5500	4000K	210×180
05709	LED Floodlight DECO 50W	50W	5500	6000K	210×180

CLASSIFICATION

50000hrs | A+ | IP65 | Beam Angle 120°
CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type AL/Glass

BOX 10/20W 24pcs
BOX 30/50W 20pcs

DIMENSIONS



LED FLOODLIGHTS DECO BLACK
10-30W GREEN

SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
11601	LED Floodlight DECO 10W	10W		GREEN	110×90
11625	LED Floodlight DECO 20W	20W		GREEN	140×120
11649	LED Floodlight DECO 30W	30W		GREEN	170×150

LED FLOODLIGHTS DECO WHITE

10-50W



3 YEARS WARRANTY


TOSHIBA Leading Innovation
LED chips inside

CLASSIFICATION


50000 hrs | A+ | IP65 | Beam Angle 120° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type AL/PC | Kelvin 6000K

BOX 10/20W 24pcs | BOX 30/50W 20pcs

PHOTOMETRIC DATA



DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
05747	LED Floodlight DECO 10W	10W	1100	6000K	110×90
05785	LED Floodlight DECO 20W	20W	2200	6000K	140×120
05822	LED Floodlight DECO 30W	30W	3300	6000K	170×150
05860	LED Floodlight DECO 50W	50W	5500	6000K	210×180

LED FLOODLIGHTS DECO

SENSOR




TOSHIBA Leading Innovation
LED chips inside

CLASSIFICATION

50000 hrs | A+ | IP65 | Beam Angle 120° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type AL/PC | Sensor Range max 12m | Kelvin 6000K


BOX 10/20W 24pcs | BOX 30W 20pcs

PHOTOMETRIC DATA



3 YEARS WARRANTY

DIMENSIONS




SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
06232	DECO Sensor 10W IP65	10W	1100	6000K	110×170
06256	DECO Sensor 20W IP65	20W	2200	6000K	140×200
06270	DECO Sensor 30W IP65	30W	3300	6000K	170×150

LED FLOODLIGHTS DECO

80-400W









TOSHIBA
Leading Innovation
LED chips inside


CLASSIFICATION



DIMENSIONS



PHOTOMETRIC DATA



3 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	A × B mm
11250	LED Floodlight DECO 80W	80W	8000	280 × 250
11298	LED Floodlight DECO 100W	100W	10000	280 × 250
11335	LED Floodlight DECO 150W	150W	15000	350 × 310
11373	LED Floodlight DECO 200W	200W	20000	350 × 340
84414	LED Floodlight DECO 300W	300W	30000	460 × 340
13728	LED Floodlight DECO 400W	400W	40000	500 × 380

LED FLOODLIGHTS SPORT

150-300W
120 lm/W


PHILIPS
LED chips




CLASSIFICATION

50000hrs | A+ | IP65 | Kelvin 5000K | CRI ≥80 | PF >0.98 | Beam Angle 25° | Beam Angle 60° | Voltage AC230V | Body Type Metal Galvanizet, Powder coated | BOX 1 pcs

DIMENSIONS



PHOTOMETRIC DATA

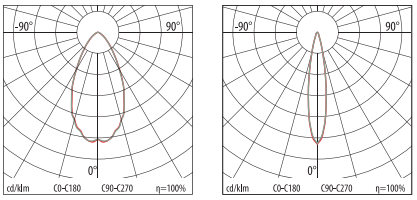

5 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	A × B × C mm
84667	LED Floodlight SPORT 150W 25°	150W	18000	357×361×65
84650	LED Floodlight SPORT 150W 60°	150W	18000	357×361×65
74897	LED Floodlight SPORT 200W 25°	200W	24000	357×445×65
74880	LED Floodlight SPORT 200W 60°	200W	24000	357×445×65
84674	LED Floodlight SPORT 250W 25°	250W	30000	357×530×65
84681	LED Floodlight SPORT 250W 60°	250W	30000	357×530×65
84698	LED Floodlight SPORT 300W 25°	300W	36000	357×597×65
84704	LED Floodlight SPORT 300W 60°	300W	36000	357×597×65

LED HIGH BAY OLIMPIA


140 lm/W
IP66








CLASSIFICATION



DIMENSIONS




DIMMING FUNCTION



0-10V
option - DALI

PHOTOMETRIC DATA





SKU	Model	EQ. Watts	Lumens	A × B mm
36574	LED High Bay OLIMPIA 100W	100W	14000	Ø 350 × 150
36581	LED High Bay OLIMPIA 150W	150W	21000	Ø 350 × 150
36598	LED High Bay OLIMPIA 200W	200W	28000	Ø 450 × 180

LED HIGH BAY UFO ORANGE


120LM/W
IP6











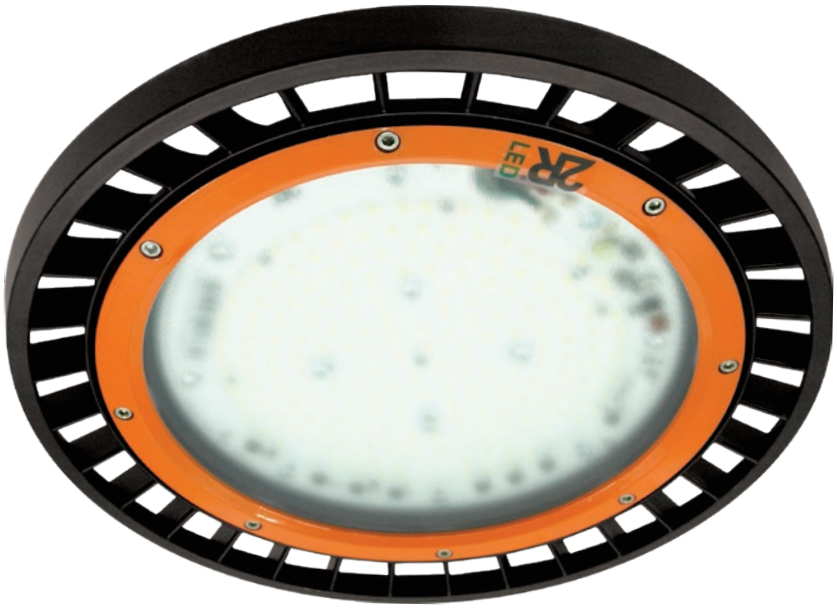


CLASSIFICATION



DIMENSIONS



PHOTOMETRIC DATA





SKU	Model	EQ. Watts	Lumens	A × B mm
26537	LED High Bay UFO Orange 60W	60W	7200	Ø 350 × 70
26506	LED High Bay UFO Orange 100W	100W	12000	Ø 350 × 70
26513	LED High Bay UFO Orange 150W	150W	18000	Ø 450 × 80
26520	LED High Bay UFO Orange 200W	200W	24000	Ø 450 × 80

NHLED 302


60-240W



CLASSIFICATION

50000hrs | A+ | IP66 | Beam Angle 60-110° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type AL+Glass | Kelvin 4000K 5000K | BOX 1 pcs

DIMENSIONS



5 YEARS WARRANTY


Specification

- SMD LEDs
- Die-casting aluminum housing and heat sink
- Powder coated surface treatment
- Built-in constant current LED driver
- 60°, 90°and 110° beam angle available

Options

- Philips constant current LED driver for option
- Microwave sensor for option
- Pole mounted and wall mounted installation for option

PHOTOMETRIC DATA



SKU	Model	EQ. Watts	Lumens	A × B mm
35322	NHLED302 60W 5000K 90°	60W	6600	Ø 280 × 185
49482	NHLED302 100W 4000K 60°	100W	12860	Ø 280 × 185
42467	NHLED302 100W 4000K 90°	100W	12860	Ø 280 × 185
35323	NHLED302 100W 5000K 90°	100W	12860	Ø 280 × 185
42468	NHLED302 150W 4000K 90°	150W	16500	Ø 340 × 187
49044	NHLED302 200W 4000K 110°	200W	27860	Ø 400 × 197
42469	NHLED302 240W 4000K 110°	240W	34320	Ø 400 × 197


LED STREET LIGHT GRANADA PRO

140 lm/W






CLASSIFICATION



DIMENSIONS




DIMMING FUNCTION 0-10V



Light
TOP QUALITY PRODUCTS BY 2R

10 YEARS WARRANTY

PHOTOMETRIC DATA






SKU	Model	EQ. Watts	Lumens	A × B × C mm
27015	Solar Granada PRO 20W 12V	20W	2500	460 × 260 × 100
84445	Granada PRO 25W IP66	25W	3500	460 × 260 × 99
12417	Granada PRO 40W IP66	40W	5600	460 × 260 × 100
60838	Granada PRO 50W IP66	50W	7000	460 × 260 × 100
12424	Granada PRO 65W IP66	65W	9100	460 × 260 × 100
60845	Granada PRO 75W IP66	75W	10500	460 × 260 × 100
12431	Granada PRO 100W IP66	100W	14000	460 × 260 × 100
84452	Granada PRO 120W IP66	120W	16800	530 × 330 × 130
12448	Granada PRO 150W IP66	150W	21000	530 × 330 × 130
84469	Granada PRO 200W IP66	200W	28000	530 × 330 × 130
27039	Photocell sensor			

LED STREET LIGHT GRANADA SB
140 lm/W


PHOTOMETRIC DATA






SKU	Model	EQ. Watts	Lumens	A × B × C mm
27152	LED Street Light Granada SB 20	20W	2800	490×260×70
27190	LED Street Light Granada SB 30	30W	4200	490×260×70
09004	LED Street Light Granada SB 40	40W	5600	490×260×70
27251	LED Street Light Granada SB 50	50W	7000	490×260×70
27282	LED Street Light Granada SB 60	60W	8400	490×260×70

CLASSIFICATION




DIMENSIONS



LED STREET LIGHT GRANADA SB
140 lm/W


PHOTOMETRIC DATA






SKU	Model	EQ. Watts	Lumens	A × B × C mm
09110	LED Street Light Granada SB 80	80W	11200	560×260×70

CLASSIFICATION




DIMENSIONS



LED STREET LIGHT GRANADA SB
140 lm/W

PHOTOMETRIC DATA






SKU	Model	EQ. Watts	Lumens	A × B × C mm
09028	LED Street Light Granada SB 120	120W	16800	710×260×70
27114	LED Street Light Granada SB 150	150W	21000	710×260×70

CLASSIFICATION



DIMENSIONS



LED STREET LIGHT GRANADA BASIC

120 lm/W






CLASSIFICATION


30000hrs | A+ | IP66 | Beam Angle 140°/60°
CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type ALUM
BOX 20W 20 pcs | BOX 40W 16 pcs | BOX 80W 10 pcs | Kelvin 5000K

PHOTOMETRIC DATA



3 YEARS WARRANTY

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Ø mm	A × B mm
16453	LED Street Light Granada BASIC	20W	2400	Ø 40	360×110×50
16460	LED Street Light Granada BASIC	40W	4800	Ø 50	410×120×50
16477	LED Street Light Granada BASIC	80W	9600	Ø 60	600×160×60

LED STREET LIGHT GRANADA MINI


110 lm/W



CLASSIFICATION


50000hrs | A+ | IP66 | Beam Angle 120°
CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type ALUM
BOX 1 pcs | Kelvin 3000K 5000K

PHOTOMETRIC DATA



3 YEARS WARRANTY

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
26988	LED Street Light GRANADA MINI	12W	1320	3000K	350×100×100
26995	LED Street Light GRANADA MINI	12W	1320	5000K	350×100×100
11083	LED Street Light GRANADA MINI	24W	2640	5000K	350×100×100

LED STREET LIGHT NOVA S PRO

120 lm/W




BRIDGELUX

CLASSIFICATION

50000hrs | A++ | IP66 | Beam Angle 120° | CRI ≥80 | PF >0.98 | Voltage AC230V | Body Type PC-PC | Kelvin 5000K | BOX 1 pcs

PHOTOMETRIC DATA




Light TOP QUALITY PRODUCTS BY 2R

TOP QUALITY PRODUCTS 2R WARRANTY

5 YEARS WARRANTY

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	A × B × C mm
07925	LED Street Light NOVA S PRO	30W	3600	780×170×100
07963	LED Street Light NOVA S PRO	40W	4800	780×170×100

LED STREET LIGHT GRANADA 2


100 lm/W



CLASSIFICATION


50000hrs | A+ | IP66 | Beam Angle 120° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type ALUM | Kelvin 5000K | BOX 1 pcs

PHOTOMETRIC DATA



2 YEARS WARRANTY

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	A × B × C mm
09035	LED Street Light Granada 2	42W	4200	380×310×80
09059	LED Street Light Granada 2	70W	7000	500×310×80
09080	LED Street Light Granada 2	112W	11200	680×310×80


SOLAR LIGHT SYSTEM
2R ISTAR GRANADA SB



CLASSIFICATION



DIMENSIONS




Light
TOP QUALITY PRODUCTS BY 2R

5 YEARS WARRANTY

5 years for the system
2 years for the battery

SKU	Model	EQ. Watts	Lumens	Solar Panel	Controler	Battery
18327	2R iStar Granada SB	10W	1400	50Wp/12V	12V/24V 10A	AGM 33Ah
18334	2R iStar Granada SB	15W	2100	80Wp/12V	12V/24V 10A	AGM 55Ah
18341	2R iStar Granada SB	20W	2800	100Wp/12V	12V/24V 10A	AGM 75Ah
18358	2R iStar Granada SB	30W	4200	160Wp/12V	12V/24V 10A	AGM 100Ah
18365	2R iStar Granada SB	40W	5600	160Wp/12V	12V/24V 10A	AGM 120Ah

SOLAR LIGHT SYSTEM
2R ISTAR GRANADA SB
WITH POLE

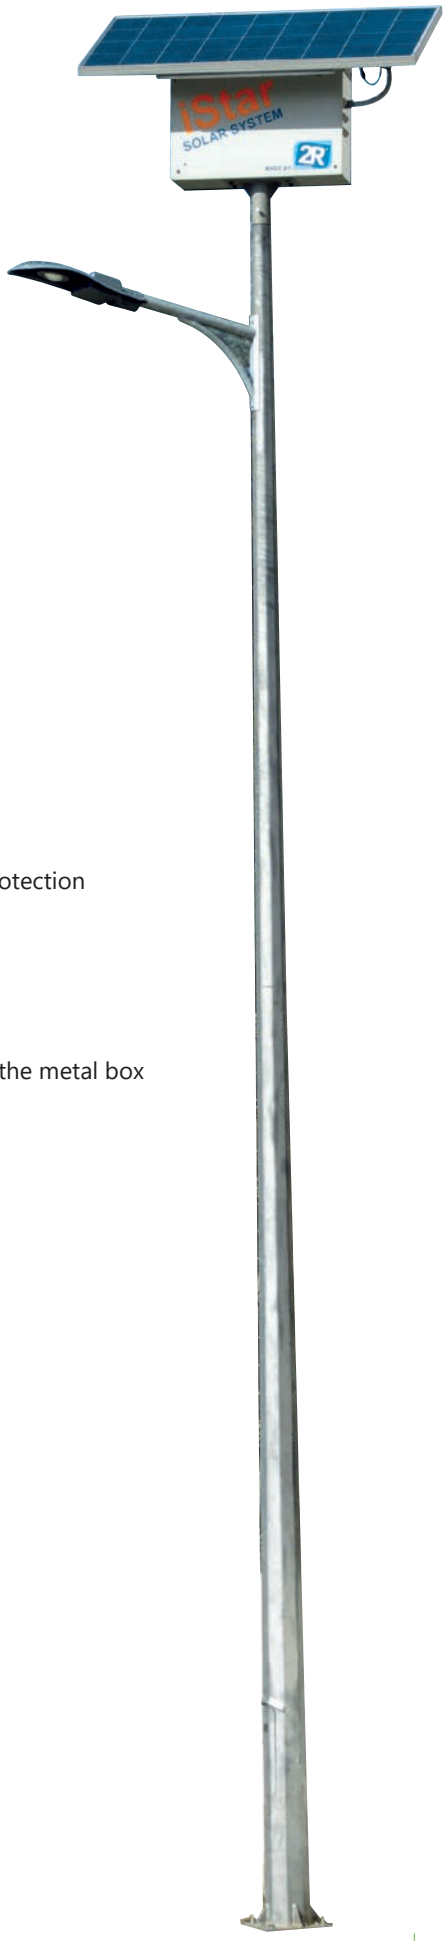

24 YEARS WARRANTY

Lighting fixture: Granada SB 10W, 15W, 20W, 30W, 40W

Solar Panel: set with aluminium frame and connectors

Controller: 12/24V, IP68 programmable with automatic on/off, and overcharge protection for the battery

Battery AGM technology, maintenance-free

Metal Box: Waterproof metal box - Ruco IP65

Metal holders: Steel, providing optimal orientation of the panel, reliable fixing of the metal box and orientation of the lighting fixture in the right direction.

Cable Fittings: System made of high-quality cables and terminal boxes.

Spare capacity of the system - 30 hours.

CLASSIFICATION

50000hrs | CRI ≥80 | IP66 | Beam Angle 120° | PF >0.9 | Kelvin 5000K | Body Type AL/PC

SKU	Model
18372	2R iStar Granada SB 10W with pole 4m
18389	2R iStar Granada SB 15W with pole 4m
18396	2R iStar Granada SB 20W with pole 6m
18402	2R iStar Granada SB 30W with pole 6m
18419	2R iStar Granada SB 40W with pole 6m

LED SECURITY LIGHT KONA

IP65






Dusk to Dawn Photocell Function



Horizontal level




Mounting with a 1/2" conduit at the bottom and mounting with J-box


CLASSIFICATION


50000hrs | A+ | IP65 | Beam Angle 120° | CRI ≥80 | PF >0.98 | Voltage 100-277V | Body Type PC | BOX 12 pcs | Kelvin 6000K

DIMENSIONS



PHOTOMETRIC DATA



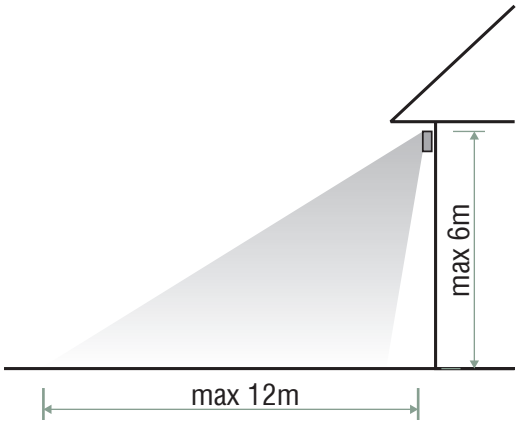

SKU	Model	EQ. Watts	Lumens	A × B × C mm
15661	LED Security Light KONA 402	13W	1500	140×240×90
12462	LED Security Light KONA 402	26W	3000	140×240×90

WALL LAMP RINO

GU10
IP65

2 YEARS WARRANTY



SKU	Model	EQ. Watts	Dimensions mm
06409	Wall lamp RINO 104 Ø65 Single Grey	max. 10W	Ø 65×160×115
36901	Wall lamp RINO 104 Ø65 Single Black	max. 10W	Ø 65×160×115
06416	Wall lamp RINO 105 Ø65 Double Grey	max. 10W	Ø 65×160×115
36895	Wall lamp RINO 105 Ø65 Double Black	max. 10W	Ø 65×160×115

CLASSIFICATION

IP65 | A+ | Voltage AC230V | Body Type AL+Glass | Base GU10 | BOX 50 pcs

LED WALL LAMP BARSA

IP65

2 YEARS WARRANTY



SKU	Model	EQ. Watts	Lumens	Dimensions mm
27688	LED Wall Lamp Barsa R 1x10W	10W	1000	Ø 90×160×150
83882	LED Wall Lamp Barsa R 2x10W	2x10W	2000	Ø 90×260×150

CLASSIFICATION

30000hrs | A+ | IP65 | Beam Angle 60° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type AL+Glass | Kelvin 4500K | BOX 10W 25pcs | BOX 12W 12pcs

LED WALL LAMP POZITANO

SD039/SD040
IP44

2 YEARS WARRANTY



SKU	Model	EQ. Watts	Lumens	Dimensions mm
83905	LED Wall Lamp POZITANO SD039 3000K	7W	700	73×100×100
83929	LED Wall Lamp POZITANO SD039 4000K	7W	700	73×100×100
83943	LED Wall Lamp POZITANO SD040 3000K	15W	1500	90×130×130
83967	LED Wall Lamp POZITANO SD040 4000K	15W	1500	90×130×130

CLASSIFICATION

30000hrs | A+ | IP65 | Beam Angle 60° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type AL+Glass | Kelvin 3000K 4000K | BOX 30 pcs

LED WALL LAMP POZITANO R

IP44

2 YEARS WARRANTY



SKU	Model	EQ. Watts	Lumens	Dimensions mm
83820	LED Wall Lamp POZITANO R Single 3000K	3W	700	70×70×80
37229	LED Wall Lamp POZITANO R Single 4000K	3W	700	70×70×80
83844	LED Wall Lamp POZITANO R Double 3000K	2x3W	1500	70×150×80
06454	LED Wall Lamp POZITANO R Double 4000K	2x3W	1500	70×150×80

CLASSIFICATION

30000hrs | A+ | IP44 | Beam Angle 60° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type AL+Glass | Kelvin 3000K 4000K | BOX 50 pcs

LED WALL LAMP SIERRA 003

IP44

2 YEARS WARRANTY



SKU	Model	EQ. Watts	Lumens	Dimensions mm
83738	Wall lamp SIERRA 003 3000K Black	6W	600	100×100×100
37113	Wall lamp SIERRA 003 4000K Black	6W	600	100×100×100
83752	Wall lamp SIERRA 003 3000K White	6W	600	100×100×100
37120	Wall lamp SIERRA 003 4000K White	6W	600	100×100×100

CLASSIFICATION

30000hrs | A+ | IP44 | Beam Angle 60° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum | Kelvin 3000K 4000K

BOX 20 pcs

LED WALL LAMP SIERRA 004

IP44

2 YEARS WARRANTY





SKU	Model	EQ. Watts	Lumens	Dimensions mm
83721	Wall lamp SIERRA 004 3000K Black	6W	600	140×100×120
06911	Wall lamp SIERRA 004 4000K Black	6W	600	140×100×120
83660	Wall lamp SIERRA 004 3000K White	6W	600	140×100×120
06928	Wall lamp SIERRA 004 4000K White	6W	600	140×100×120

CLASSIFICATION

30000hrs | A+ | IP44 | Beam Angle 60° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum | Kelvin 3000K 4000K

BOX 20 pcs

LED WALL LAMP SIERRA 2007

IP44

2 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Dimensions mm
83981	Wall lamp SIERRA 2007A 3000K	5W	500	100×80×100
84001	Wall lamp SIERRA 2007A 4000K	5W	500	100×80×100
84025	Wall lamp SIERRA 2007B 3000K	5W	500	200×80×100
84049	Wall lamp SIERRA 2007B 4000K	5W	500	200×80×100
84063	Wall lamp SIERRA 2007C 3000K	10W	1000	370×80×100
84087	Wall lamp SIERRA 2007C 4000K	10W	1000	370×80×100
84100	Wall lamp SIERRA 2007D 3000K	15W	1500	530×80×100
84124	Wall lamp SIERRA 2007D 4000K	15W	1500	530×80×100

CLASSIFICATION

30000hrs | A+ | IP65 | Beam Angle 60° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum | Kelvin 3000K 4000K

BOX 5W A 30pcs | BOX 5W B 20pcs

BOX 10W 15pcs | BOX 15W 12pcs

LED WALL LAMP SIERRA 2059

IP44

2 YEARS WARRANTY



SKU	Model	EQ. Watts	Lumens	Dimensions mm
84148	Wall lamp SIERRA 2059A 3000K	5W	500	180×80×55
37205	Wall lamp SIERRA 2059A 4000K	5W	500	180×80×55
84162	Wall lamp SIERRA 2059B 3000K	10W	1000	350×80×55
06478	Wall lamp SIERRA 2059B 4000K	10W	1000	350×80×55
84186	Wall lamp SIERRA 2059C 3000K	15W	1500	520×80×55
84209	Wall lamp SIERRA 2059C 4000K	15W	1500	520×80×55

CLASSIFICATION

30000hrs | A+ | IP44 | Beam Angle 60° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum | Kelvin 3000K 4000K

BOX 5W 20pcs | BOX 10W 20pcs | BOX 15W 10pcs

LED WALL LAMP SIERRA 2052

IP44



2 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Kelvin	Dimensions mm
83868	LED Wall lamp SIERRA 2052	6W	600	3000K	100×140×100
06522	LED Wall lamp SIERRA 2052	6W	600	4000K	100×140×100

CLASSIFICATION

30000hrs | A+ | IP44 | Beam Angle 60° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum | Kelvin 3000K 4000K | BOX 30 pcs

LED WALL LAMP SIERRA

W30/W31

IP44



SIERRA W30 SIERRA W31

2 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Kelvin	Dimensions mm
83806	LED Wall lamp SIERRA W30	6W	600	3000K	115×90×29
06393	LED Wall lamp SIERRA W30	6W	600	4000K	115×90×29
83783	LED Wall lamp SIERRA W31	10W	1000	3000K	175×90×29
06386	LED Wall lamp SIERRA W31	10W	1000	4000K	175×90×29

CLASSIFICATION

30000hrs | A+ | IP44 | Beam Angle 60° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum | Kelvin 3000K 4000K | BOX 6W 50pcs | BOX 10W 60pcs

LED WALL LAMP SIRIUS

IP44



SIRIUS 2×3W SIRIUS 2x1W SIRIUS 1W

2 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Kelvin	Dimensions mm
08373	LED Wall Lamp SIRIUS 1W	1W	100	6000K	40×80×45
08397	LED Wall Lamp SIRIUS 2x1W	2W	200	6000K	40×100×45
27930	LED Wall Lamp SIRIUS 2x3W	6W	600	6000K	60×165×110

CLASSIFICATION

30000hrs | A+ | IP44 | Beam Angle 60° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type Alum | Kelvin 6000K | BOX 1/2W 100 pcs | BOX 6W 10pcs

LED WALL LAMP ELLIPSE
IP65



2 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Dimensions mm
14459	Wall lamp ELLIPSE 10W White	10W	1000	208×98×60
14473	Wall lamp ELLIPSE 10W Black	10W	1000	208×98×60
14497	Wall lamp ELLIPSE 18W White	18W	1800	263×135×68
14510	Wall lamp ELLIPSE 18W Black	18W	1800	263×135×68

CLASSIFICATION

25000hrs | A+ | IP65 | Beam Angle 150° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type PC | BOX 10W 50pcs | BOX 18W 40pcs | Kelvin 3000K 4000K

LED WALL LAMP POZITANO
IP44



POZITANO 3141



POZITANO 3142

2 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Dimensions mm
36949	Wall lamp POZITANO 3141	18W	1800	200×290×90
36956	Wall lamp POZITANO 3142	18W	1800	200×290×90

CLASSIFICATION

30000hrs | A+ | IP44 | Beam Angle 60° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type Alum | BOX 10 pcs | Kelvin 4500K

LED WALL LAMP POZITANO
IP44



POZITANO 20149



POZITANO 3140

2 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Dimensions mm
36932	Wall lamp POZITANO 3140	18W	1800	280×160×120
06881	Wall lamp POZITANO 20149	4W	400	300×90×150

CLASSIFICATION

30000hrs | A+ | IP44 | Beam Angle 60° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type Alum | BOX 4W 10pcs | BOX 18W 6pcs | Kelvin 4500K

LED EMERGENCY LIGHT EXIT GLASS



2 YEARS WARRANTY

SKU	Model	EQ. Watts	Dimensions mm
15937	LED Emergency Light EXIT Glass	3W	330×182×40
15975	LED Emergency Light EXIT Glass Right	3W	330×182×40
16019	LED Emergency Light EXIT Glass Left	3W	330×182×40

CLASSIFICATION

30000hrs | A+ | IP44 | Beam Angle 300° | emergency time 2 hrs | recharging time 20 hrs | Voltage AC230V | Body Type Alum + Glass

BOX 10 pcs

LED EMERGENCY LIGHT EXIT



2 YEARS WARRANTY

Note:
The emergency light fixture has single-sided and double-sided versions

SKU	Model	EQ. Watts	Dimensions mm
31364	LED Emergency Light EXIT	3W	330×145×25
31388	LED Emergency Light EXIT Right	3W	330×145×25
31371	LED Emergency Light EXIT Left	3W	330×145×25
31395	LED Emergency Light EXIT Down	3W	330×145×25
31401	LED Emergency Light EXIT 2F	3W	330×145×25
31425	LED Emergency Light EXIT 2F Right	3W	330×145×25
31418	LED Emergency Light EXIT 2F Left	3W	330×145×25
31432	LED Emergency Light EXIT 2F Down	3W	330×145×25
18167	LED Emergency Light EXIT 2F Option	3W	330×145×25

CLASSIFICATION

30000hrs | A+ | IP44 | Beam Angle 300° | emergency time 2 hrs | recharging time 20 hrs | Voltage AC230V | Body Type Alum + Glass

BOX 20 pcs

LED EMERGENCY LIGHT EXIT 2F



2 YEARS WARRANTY

Note:
The emergency light fixture has double-sided versions only

SKU	Model	EQ. Watts	Dimensions mm
16309	LED Emergency Light EXIT 2F	6W	600×200×25
16323	LED Emergency Light EXIT 2F Right	6W	600×200×25
16347	LED Emergency Light EXIT 2F Left	6W	600×200×25

CLASSIFICATION

30000hrs | A+ | IP44 | Beam Angle 300° | emergency time 2 hrs | recharging time 20 hrs | Voltage AC230V | Body Type Alum + Glass

BOX 10 pcs

NEBRASKA
EMERGENCY LIGHT

3 YEARS WARRANTY






CLASSIFICATION



DIMENSIONS




Note:
Supplied with standard ("Man running towards door") sticker kit


SKU	Model	EQ. Watts	Lumens	Kelvin	A × B × C mm
14145	NNE/2/LED/M3/V3	2W	116	3400K	352×56×110

LED WALL WASHER
IP66


3 YEARS WARRANTY

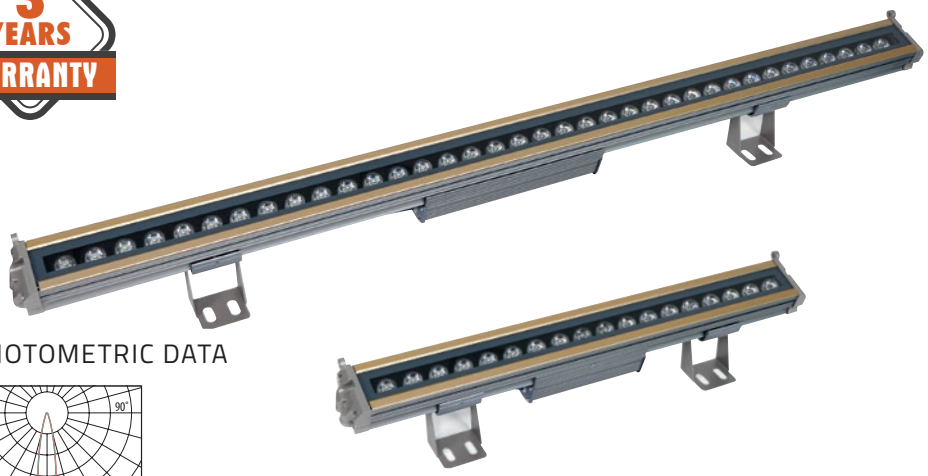






PHOTOMETRIC DATA




CLASSIFICATION



SKU	Model	EQ. Watts	Lumens	Kelvin	A × B × C mm
16095	LED Wall Washer 18W 5000K	18W	1800	5000K	500×40×40
16101	LED Wall Washer 18W RGB	18W	1800	RGB	500×40×40
16118	LED Wall Washer 36W 5000K	36W	3600	5000K	1000×40×40
16125	LED Wall Washer 36W RGB	36W	3600	RGB	1000×40×40

DIMENSIONS



LED UNDERGROUND LAMP
TERRA UB
230V IP67




SKU	Model	EQ. Watts	Lumens	Dimensions mm	Cut out
22386	LED TERRA UB126 6W	6W	600	Ø116	Ø102×74×150
22393	LED TERRA UB129 12W	12W	1200	Ø173	Ø155×163×220
22416	LED TERRA UB170 18W	18W	1800	Ø210	Ø179×177×220
22423	LED TERRA UB173 25W	25W	2500	Ø250	Ø222×218×220

CLASSIFICATION

30000hrs | A+ | IP67 | Beam Angle 24°
CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type Alum
Kelvin 6000K | Circular monting hole
BOX 6W 8pcs | BOX 12/18W 4pcs | BOX 25W 2pcs

DIMENSIONS



LED UNDERGROUND LAMP
TERRA UB
24V IP67




SKU	Model	EQ. Watts	Lumens	Dimensions mm	Cut out
22409	LED TERRA UB134 0.5W	0.5W	50	Ø 45	Ø 42×67×83
22430	LED TERRA UB607 1.5W	1.5W	150	Ø 65	Ø 42×67×83

CLASSIFICATION

30000hrs | A+ | IP67 | Beam Angle 35°
CRI ≥80 | PF >0.9 | Voltage DC24V | Body Type Alum
Kelvin 6000K | Circular monting hole
BOX 0.5W 10pcs | BOX 1.5W 8pcs

DIMENSIONS



LED UNDERGROUND LAMP
TERRA UB LINE
24V IP67




SKU	Model	EQ. Watts	Lumens	Dimensions mm	Cut out
22447	LED TERRA UB Line357	6W	600	195×63×65	180×58×90
22454	LED TERRA UB Line657	12W	1200	328×63×65	313×58×90

CLASSIFICATION


30000hrs | A+ | IP67 | Beam Angle 25°
CRI ≥80 | PF >0.9 | Voltage DC24V | Body Type Alum
Kelvin 6000K | Circular monting hole
BOX 6W 10pcs | BOX 12W 6pcs

DIMENSIONS




LED TRACK LIGHT METRO





PHOTOMETRIC DATA



2 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens	Kelvin	Ø × A × B mm
14299	METRO 01 3000K 4 wire Black	20W	2000	3000K	Ø76×200×120
14336	METRO 01 4500K 4 wire Black	20W	2000	4500K	Ø76×200×120
14374	METRO 02 3000K 4 wire Black	30W	3000	3000K	Ø96×215×145
14411	METRO 02 4500K 4 wire Black	30W	3000	4500K	Ø96×215×145

CLASSIFICATION

50000hrs | A+ | IP21 | Beam Angle 24° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type Alum

BOX 20W 20pcs | BOX 30W 12pcs | 3 Phase


DIMENSIONS



LED TRACK LIGHT METRO



PHOTOMETRIC DATA



2 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Kelvin	Ø × A × B mm
14312	METRO 01 3000K 4 wire White	20W	2000	3000K	Ø76×200×120
14350	METRO 01 4500K 4 wire White	20W	2000	4500K	Ø76×200×120
14398	METRO 02 3000K 4 wire White	30W	3000	3000K	Ø96×215×145
14435	METRO 02 4500K 4 wire White	30W	3000	4500K	Ø96×215×145


LED TRACK LIGHT
METRO PAM BLACK








PHOTOMETRIC DATA




5 YEARS WARRANTY

CLASSIFICATION



SKU	Model	EQ. Watts	Lumens	Kelvin	Ø × A × B mm
14923	METRO PAM 30W 4 wire Black	30W	2550	3000K	Ø100×123×210
14947	METRO PAM 30W 4 wire Black	30W	2550	4000K	Ø100×123×210
14848	METRO PAM 50W 4 wire Black	50W	4250	3000K	Ø100×123×210
14862	METRO PAM 50W 4 wire Black	50W	4250	4000K	Ø100×123×210


DIMENSIONS



LED TRACK LIGHT
METRO PAM WHITE



PHOTOMETRIC DATA



5 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Kelvin	Ø × A × B mm
14886	METRO PAM 30W 4wire White	30W	2550	3000K	Ø100×123×210
14909	METRO PAM 30W 4wire White	30W	2550	4000K	Ø100×123×210
14800	METRO PAM 50W 4wire White	50W	4250	3000K	Ø100×123×210
14824	METRO PAM 50W 4wire White	50W	4250	4000K	Ø100×123×210


LED TRACK LIGHT VARIO



LED Track light
VARIO 15°- 60° Black




CLASSIFICATION




5 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens	Kelvin	Ø × A × B mm
15005	VARIO 20W 3000K Black	20W	1700	3000K	Ø92×172-200×85
15029	VARIO 20W 4000K Black	20W	1700	4000K	Ø92×172-200×85
15081	VARIO 30W 3000K Black	30W	2550	3000K	Ø92×172-200×85
15104	VARIO 30W 4000K Black	30W	2550	4000K	Ø92×172-200×85
15166	VARIO 40W 3000K Black	40W	3400	3000K	Ø92×172-200×85
15180	VARIO 40W 4000K Black	40W	3400	4000K	Ø92×172-200×85

DIMENSIONS



PHOTOMETRIC DATA





LED TRACK LIGHT VARIO



LED Track light
VARIO 15°- 60° White

5 YEARS WARRANTY

SKU	Model	EQ. Watts	Lumens	Kelvin	Ø × A × B mm
14961	VARIO 20W 3000K White	20W	1700	3000K	Ø92×172-200×85
14985	VARIO 20W 4000K White	20W	1700	4000K	Ø92×172-200×85
15043	VARIO 30W 3000K White	30W	2550	3000K	Ø92×172-200×85
15067	VARIO 30W 4000K White	30W	2550	4000K	Ø92×172-200×85
15128	VARIO 40W 3000K White	40W	3400	3000K	Ø92×172-200×85
15142	VARIO 40W 4000K White	40W	3400	4000K	Ø92×172-200×85

TRACK LINES



SKU	Model
16156	Track Line for Metro 4 wire 1m Black
16132	Track Line for Metro 4 wire 1m White
16194	Track Line for Metro 4 wire 2m Black
16170	Track Line for Metro 4 wire 2m White

CLASSIFICATION

Body Type AL+PC | 3 Phase | BOX 10 pcs

CONNECTORS FOR LINES



Connector 90°



Connector 90°



Connector 180°

SKU	Model
16279	Connector 90° for Metro 4 wire Black
16255	Connector 90° for Metro 4 wire White
16231	Connector 180° for Metro 4 wire Black
16217	Connector 180° for Metro 4 wire White

CLASSIFICATION

Body Type PC | 3 Phase | BOX 100 pcs

NTRLED 306P



3 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens	Kelvin	Ø × A × B mm
49579	NTRLED306P 45W 3000K 24	45W	4450	3000K	Ø106×160×135
52478	NTRLED306P 45W 4000K 24	45W	4450	4000K	Ø106×160×135

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 24° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type Alum

BOX 10 pcs 1 Phase

DIMENSIONS



TLED 317N



3 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens	Kelvin	Color	Ø × A × B mm
15005	TLED 317N 50W 3000K 40° B	50W	3000	3000K	black	Ø173×244×193
15029	TLED 317N 50W 3000K 40° W	50W	3000	3000K	white	Ø173×244×193

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 40° | CRI ≥80 | PF >0.9 | Voltage AC230V | Body Type Alum

BOX 6 pcs 3 Phase

DIMENSIONS



LED CEILING LAMP 6123



3 in 1
THREE LIGHT COLOR CHOICE ONE CEILING LAMP

2 YEARS WARRANTY

DIMMABLE

Note:
Dimm - Dimmable
3 White - The color temp can be changed with the switch

SKU	Model	EQ. Watts	Lumens	Kelvin	Dimensions mm
16576	LED Ceiling lamp 6123A **3White**	24W	2400	3White	Ø 430
16613	LED Ceiling lamp 6123A **3White**	36W	3600	3White	Ø 530
49192	LED Ceiling lamp 6123A **Dimm**	36W	3600	3000K	Ø 530
49178	LED Ceiling lamp 6123A **Dimm**	36W	3600	4500K	Ø 530


CLASSIFICATION

50000hrs | A+ | IP21 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type PC | Kelvin 3000K 4500K

BOX 24W 10pcs | BOX 36W 5pcs

DIMENSIONS

Ø mm



LED CEILING LAMP 6142



3 in 1
THREE LIGHT COLOR CHOICE ONE CEILING LAMP

2 YEARS WARRANTY

DIMMABLE

Note:
Dimm - Dimmable
3 White - The color temp can be changed with the switch

SKU	Model	EQ. Watts	Lumens	Kelvin	Dimensions mm
16736	LED Ceiling lamp 6142A **3White**	12W	1200	3White	Ø 280
16774	LED Ceiling lamp 6142A **3White**	18W	1800	3White	Ø 340
16798	LED Ceiling lamp 6142A **3White**	24W	2400	3White	Ø 390
16903	LED Ceiling lamp 6142A **3White**	36W	3600	3White	Ø 480
16941	LED Ceiling lamp 6142A **3White**	48W	4800	3White	Ø 580
49239	LED Ceiling lamp 6142A **Dimm**	48W	4800	3000K	Ø 580
49215	LED Ceiling lamp 6142A **Dimm**	48W	4800	4500K	Ø 580


CLASSIFICATION

50000hrs | A+ | IP21 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type PC | Kelvin 3000K 4500K

BOX 12W 20 pcs | BOX 18/24W 10 pcs | BOX 36/48W 5 pcs

DIMENSIONS

Ø mm



LED CEILING LAMP 8008



3 in 1
THREE LIGHT COLOR CHOICE ONE CEILING LAMP

2 YEARS WARRANTY

Note:
3 White - The color temp can be changed with the switch

SKU	Model	EQ. Watts	Lumens	Kelvin	Dimensions mm
15531	LED Ceiling lamp 8008D **3White**	48W	4800	3White	Ø 580
16538	LED Ceiling lamp 8008D **3White** with remote controler	80W	8000	3White	Ø 780


CLASSIFICATION

50000hrs | A+ | IP21 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type PC

BOX 1 pcs

DIMENSIONS

Ø mm



LED CEILING LAMP 6140E



THREE LIGHT COLOR CHOICE
ONE CEILING LAMP

DIMMABLE

Note:
Dimm - Dimmable
3 White - The color temp can be changed with the switch


SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
17122	LED Ceiling lamp 6140E **3White**	18W	1800	3White	340×340
17160	LED Ceiling lamp 6140E **3White**	36W	3600	3White	440×440
17207	LED Ceiling lamp 6140E **3White**	48W	4800	3White	540×540
49277	LED Ceiling lamp 6140E **Dimm**	48W	4800	3000K	540×540
49253	LED Ceiling lamp 6140E **Dimm**	48W	4800	4500K	540×540

CLASSIFICATION

50000hrs | A+ | IP21 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type PC | Kelvin 3000K 4500K

BOX 18/36W 10pcs BOX 48W 5pcs

DIMENSIONS



LED CEILING LAMP 6140F

THREE LIGHT COLOR CHOICE
ONE CEILING LAMP



Note:
3 White - The color temp can be changed with the switch


SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
17245	LED Ceiling lamp 6140F **3White**	36W	3600	3White	430×430

CLASSIFICATION

50000hrs | A+ | IP21 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type PC

BOX 10 pcs

DIMENSIONS



LED CEILING LAMP 8284

THREE LIGHT COLOR CHOICE
ONE CEILING LAMP



Note:
3 White - The color temp can be changed with the switch


SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
16699	LED Ceiling lamp 8284 **3White** with remote controller	120W	12000	3White	950×650

CLASSIFICATION

50000hrs | A+ | IP21 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type PC

BOX 1 pcs

DIMENSIONS



LED CEILING LAMP 8275

3in1
THREE LIGHT COLOR CHOICE ONE CEILING LAMP

2 YEARS WARRANTY



Note:
3 White - The color temp can be changed with the switch


SKU	Model	EQ. Watts	Lumens	Kelvin	A × B mm
17474	LED Ceiling lamp 8275A **3White**	24W	2400	3White	Ø 410
17498	LED Ceiling lamp 8275A **3White**	36W	3600	3White	Ø 510
17511	LED Ceiling lamp 8275B **3White**	36W	3600	3White	520×520

CLASSIFICATION

50000hrs | A+ | IP21 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type PC

BOX 24W 10pcs
BOX 36W 5pcs

DIMENSIONS



LED CEILING LAMP IRIS

2 YEARS WARRANTY




SKU	Model	EQ. Watts	Lumens	Ø × A mm
00551	LED Ceiling lamp IRIS F300	12W	1080	Ø 300 × 75
00575	LED Ceiling lamp IRIS F360	18W	1620	Ø 360 × 95
00599	LED Ceiling lamp IRIS F410	24W	2160	Ø 410 × 95

CLASSIFICATION

30000hrs | A+ | IP44 | Beam Angle 170° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type PC | Kelvin 4500K

BOX 12W 40pcs 18W 50pcs
BOX 24W 30pcs

DIMENSIONS



LED CEILING LAMP GALERA CF

2 YEARS WARRANTY




SKU	Model	EQ. Watts	Lumens	A × B × C mm
03286	LED Ceiling lamp GALERA CF	8W	800	250×175×80
03309	LED Ceiling lamp GALERA CF	14W	980	325×240×80

CLASSIFICATION

50000hrs | A+ | IP54 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type PC | Kelvin 4500K

BOX 8W 20pcs
BOX 14W 10pcs

DIMENSIONS



LED CEILING LAMP
GALERA GB

2 YEARS WARRANTY




CLASSIFICATION

50000hrs | A+ | IP54 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type PC | Kelvin 4500K

BOX 8/12W 20pcs BOX 18/24W 10pcs

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Ø × A mm
03262	LED Ceiling lamp GALERA GB F210	8W	800	Ø 210 × 70
02227	LED Ceiling lamp GALERA GB F270	12W	1200	Ø 270 × 70
02241	LED Ceiling lamp GALERA GB F350	18W	1800	Ø 350 × 80
02265	LED Ceiling lamp GALERA GB F390	24W	2400	Ø 390 × 80

NPXLED1008




CLASSIFICATION

50000hrs | A+ | IP20 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type PC | Kelvin 4000K

BOX 10 pcs

DIMENSIONS



SKU	Model	EQ. Watts	Lumens	Kelvin	A × B × C mm
46166	NPXLED1008 12W 4000K	12W	700	4000 K	Ø 270×92×185
46167	NPXLED1008 18W 4000K	18W	1100	4000 K	Ø 340×110×250
46168	NPXLED1008 24W 4000K	24W	1400	4000 K	Ø 395×120×267

LED SENSOR LAMP IRIS SENSE






SKU	Model	EQ. Watts	Lumens	Ø × A mm
03743	LED sensor lamp IRIS SENSE F300	12W	1080	Ø 300 × 75
03767	LED sensor lamp IRIS SENSE F400	24W	2160	Ø 410 × 95

CLASSIFICATION

50000hrs | A+ | IP44 | Beam Angle 170° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type PC | Kelvin 4500K | BOX 12W 20pcs | BOX 24W 10pcs

DIMENSIONS



LED SENSOR LAMP SENSE






SKU	Model	EQ. Watts	Lumens	Ø × A mm
08137	LED sensor lamp SENSE 2xE27	12W	1080	Ø 300 × 90

CLASSIFICATION

Voltage AC230V | A+ | IP21 | Beam Angle 170° | Body Type PS+Glass | BOX 10 pcs

DIMENSIONS



LED SENSOR LAMP SAFE SENSE






SKU	Model	EQ. Watts	Lumens	Ø × A mm
06935	LED sensor lamp SAFE SENSE 1141	8W	800	Ø 220 × 45
06942	LED sensor lamp SAFE SENSE 1141	11W	1100	Ø 280 × 50

CLASSIFICATION

50000hrs | A+ | IP44 | Beam Angle 120° | CRI ≥80 | PF >0.5 | Voltage AC230V | Body Type PC | Kelvin 6000K | BOX 20 pcs

DIMENSIONS



LED STRIP LIGHT 12V 3528 60pcs/m IP20

2 YEARS WARRANTY



SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
04542	LED Strip Light 3528 2700K	4.8W	240	2700K	8 mm	50 mm
04566	LED Strip Light 3528 4000K	4.8W	240	4000K	8 mm	50 mm
04528	LED Strip Light 3528 6000K	4.8W	240	6000K	8 mm	50 mm
08151	LED Strip Light 3528 yellow	4.8W	240	yellow	8 mm	50 mm
04481	LED Strip Light 3528 green	4.8W	240	green	8 mm	50 mm
04504	LED Strip Light 3528 red	4.8W	240	red	8 mm	50 mm
04467	LED Strip Light 3528 blue	4.8W	240	blue	8 mm	50 mm

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 120° | CRI ≥80 | Voltage DC12V | BOX 500 m

LED STRIP LIGHT 12V 3528 60pcs/m IP54

2 YEARS WARRANTY



SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
04603	LED Strip Light 3528 2700K	4.8W	240	2700K	8 mm	50 mm
04627	LED Strip Light 3528 4000K	4.8W	240	4000K	8 mm	50 mm
04580	LED Strip Light 3528 6000K	4.8W	240	6000K	8 mm	50 mm
08175	LED Strip Light 3528 yellow	4.8W	240	yellow	8 mm	50 mm
04665	LED Strip Light 3528 green	4.8W	240	green	8 mm	50 mm
04689	LED Strip Light 3528 red	4.8W	240	red	8 mm	50 mm
04641	LED Strip Light 3528 blue	4.8W	240	blue	8 mm	50 mm

CLASSIFICATION

30000hrs | A+ | IP54 | Beam Angle 120° | CRI ≥80 | Voltage DC12V | BOX 500 m

LED STRIP LIGHT 12V 3528 120pcs/m IP20

2 YEARS WARRANTY



SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
04702	LED Strip Light 3528 2700K	9,6 W	480	2700K	8 mm	25 mm
04726	LED Strip Light 3528 4000K	9,6 W	480	4000K	8 mm	25 mm
04740	LED Strip Light 3528 6000K	9,6 W	480	6000K	8 mm	25 mm

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 120° | CRI ≥80 | Voltage DC12V | BOX 500 m

LED STRIP LIGHT 12V 5050 60pcs/m IP20

2 YEARS WARRANTY



SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
04801	LED Strip Light 5050 2700K	14,4 W	576	2700K	8 mm	50 mm
04788	LED Strip Light 5050 4000K	14,4 W	576	4000K	8 mm	50 mm
04764	LED Strip Light 5050 6000K	14,4 W	576	6000K	8 mm	50 mm

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 120° | CRI ≥80 | Voltage DC12V | BOX 500 m

LED STRIP LIGHT 12V RGB 5050 IP20

2 YEARS WARRANTY



SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
04825	LED Strip Light 30pcs RGB 5050	7.2 W	360	RGB	10 mm	50 mm
04849	LED Strip Light 60pcs RGB 5050	14.4 W	720	RGB	10 mm	50 mm

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 120° | CRI ≥80 | Voltage DC12V | BOX 500 m

LED STRIP LIGHT 12V RGB 5050 IP54

2 YEARS WARRANTY



SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
04863	LED Strip Light 30pcs RGB 5050	7.2 W	360	RGB	10 mm	50 mm
04887	LED Strip Light 60pcs RGB 5050	14.4 W	720	RGB	10 mm	50 mm

CLASSIFICATION

30000hrs | A+ | IP54 | Beam Angle 120° | CRI ≥80 | Voltage DC12V | BOX 500 m

LED STRIP LIGHT 12V 2835 S-TYPE

2 YEARS WARRANTY




SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
84476	LED Strip Light 2835 S-TYPE	4.8W	240	2700K	8 mm	50 mm
84490	LED Strip Light 2835 S-TYPE	4.8W	240	4000K	8 mm	50 mm
84513	LED Strip Light 2835 S-TYPE	4.8W	240	6000K	8 mm	50 mm

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 120° | CRI ≥80 | Voltage DC12V | BOX 500 m

LED STRIP LIGHT 12V 2835 60pcs/m IP20

2 YEARS WARRANTY




SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
08298	LED Strip Light 2835 2700K	4.8W	240	2700K	8 mm	50 mm
04924	LED Strip Light 2835 4000K	4.8W	240	4000K	8 mm	50 mm
04900	LED Strip Light 2835 6000K	4.8W	240	6000K	8 mm	50 mm

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 120° | CRI ≥80 | Voltage DC12V | BOX 500 m

LED STRIP LIGHT 12V 5730 60pcs/m IP20

2 YEARS WARRANTY



SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
08199	LED Strip Light 5730 2700K	15 W	750	2700K	10 mm	25 mm
08212	LED Strip Light 5730 4000K	15 W	750	4000K	10 mm	25 mm
08236	LED Strip Light 5730 6000K	15 W	750	6000K	10 mm	25 mm

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 120° | CRI ≥80 | Voltage DC12V | BOX 500 m

LED STRIP LIGHT 230V 2835 60pcs/m IP54

2 YEARS WARRANTY



SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
04948	LED Strip Light 2835 3000K	14.4 W	720	3000K	10 mm	1000 mm
04962	LED Strip Light 2835 6000K	14.4 W	720	6000K	10 mm	1000 mm

CLASSIFICATION

30000hrs | A+ | IP54 | Beam Angle 120° | CRI ≥80 | Voltage AC230V | BOX 100 m

LED STRIP LIGHT 230V 5050 60pcs/m IP54

2 YEARS WARRANTY



SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
04986	LED Strip Light 5050 3000K	14.4 W	720	3000K	10 mm	1000 mm
05006	LED Strip Light 5050 6000K	14.4 W	720	6000K	10 mm	1000 mm

CLASSIFICATION

30000hrs | A+ | IP54 | Beam Angle 120° | CRI ≥80 | Voltage AC230V | BOX 100 m

CONNECTOR FOR LSL 230V



SKU	Model
20832	Connector for LSL 2835 230V
20825	Connector for LSL 5050 230V

CLASSIFICATION

Voltage AC230V | A+ | BOX pcs

LED STRIP LIGHT DC24V 5050 60pcs/m IP20

2 YEARS WARRANTY



SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
10352	LED Strip Light 5050 2700	14.4 W	720	2700K	10 mm	100 mm
10390	LED Strip Light 5050 6000	14.4 W	720	6000K	10 mm	100 mm
10475	LED Strip Light RGB 5050	14.4 W	720	RGB	10 mm	100 mm

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 120° | CRI ≥80 | Voltage DC24V | BOX 500 m

LED STRIP LIGHT DC24V 3528 60pcs/m IP20

2 YEARS WARRANTY



SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
10437	LED Strip Light 3528 2700	4.8 W	240	2700K	10 mm	50 mm
10451	LED Strip Light 3528 4000	4.8 W	240	4000K	10 mm	50 mm
10413	LED Strip Light 3528 6000	4.8 W	240	6000K	10 mm	50 mm

CLASSIFICATION

30000hrs | A+ | IP20 | Beam Angle 120° | CRI ≥80 | Voltage DC24V | BOX 500 m

CONNECTORS AND PROFILES FOR LED STRIPS

2 YEARS WARRANTY



Connector 180°

SKU	Model
87156	8 mm
87163	10 mm
87170	10 mm RGB



Connector 90°

SKU	Model
87187	8 mm
87194	10 mm RGB



Connector T

SKU	Model
87200	8 mm
87217	10 mm RGB




Connector +

SKU	Model
87224	8 mm
87231	10 mm RGB



Connector 180° with cable


SKU	Model
87248	8 mm
87255	10 mm
87262	10 mm RGB





Profiles with Cover for LED Strip Lights


SKU	Model
37007	LED Strip Alu Profil CC-15.9*15.9 PVC cover





Profiles with Cover for LED Strip Lights


SKU	Model
29248	LED Strip Alu Profil CC026 PVC cover KX374
29071	Cap for profile CC 026





Profiles with Cover for LED Strip Lights


SKU	Model
29255	LED Strip Alu Profil CC031 PVC cover
29064	Cap for profile CC 031





Profiles with Cover for LED Strip Lights

SKU	Model
36888	LED Strip Alu Profil CC032 PVC cover
29057	Cap for profile CC 032





Profiles with Cover for LED Strip Lights


SKU	Model
29279	LED Strip Alu Profil CC037 PVC cover
29095	Cap for profile CC 037





Profiles with Cover for LED Strip Lights


SKU	Model
29194	LED Strip Alu Profil 11.2 PVC cover
87279	Cap for profile ALU 11.2





Profiles Open for LED Strip Lights


SKU	Model
29163	LED Strip Alu Profil 11.4*3.5





Profiles Open for LED Strip Lights


SKU	Model
37014	LED Strip Alu Profil CC013X





Profiles Open for LED Strip Lights


SKU	Model
29224	LED Strip Alu Profil CC023
29088	Cap for profile CC023





Profiles Open for LED Strip Lights

SKU	Model
29187	LED Strip Alu Profil 16.1x16.1 corner






Profiles Open for LED Strip Lights

SKU	Model
29170	LED Strip Alu Prol 13x13

LED TRANSFORMER 12V
IP20

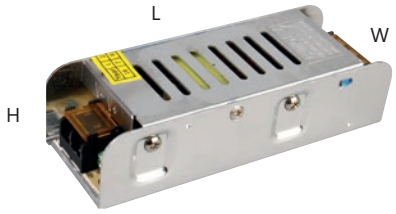

2 YEARS WARRANTY

CLASSIFICATION

IP20 | A+ | Voltage DC12V | BOX 12W 400pcs | BOX 24/36/60W 200pcs | BOX 100/150W 126pcs | BOX 250/350W 60pcs

SKU	Model	EQ. Watts	Dimensions L x W x H mm
84339	LED Transformer 12W	12W	72 × 40 × 31
05129	LED Transformer 24W	24W	85 × 58 × 34
05143	LED Transformer 36W	36W	85 × 58 × 34
05167	LED Transformer 60W	60W	126 × 46 × 32
05181	LED Transformer 100W	100W	187 × 46 × 34
05204	LED Transformer 150W	150W	187 × 46 × 34
05228	LED Transformer 250W	250W	223 × 70 × 38
12530	LED Transformer 360W	360W	223 × 70 × 38

LED TRANSFORMER 12V
IP65




2 YEARS WARRANTY

CLASSIFICATION

IP65 | A+ | Voltage DC12V | BOX 10W 100pcs | BOX 20/30W 50pcs | BOX 50/60W 40pcs | BOX 100W 15pcs

SKU	Model	EQ. Watts	Dimensions L x W x H mm
05242	LED Transformer 10W	10W	115 × 30 × 20
26612	LED Transformer 20W	20W	185 × 30 × 20
05266	LED Transformer 30W	30W	200 × 30 × 20
10253	LED Transformer 50W	50W	175 × 42 × 32
87484	LED Transformer 60W	60W	145 × 50 × 32
10338	LED Transformer 100W	100W	180 × 70 × 40

LED TRANSFORMER 24V
IP20

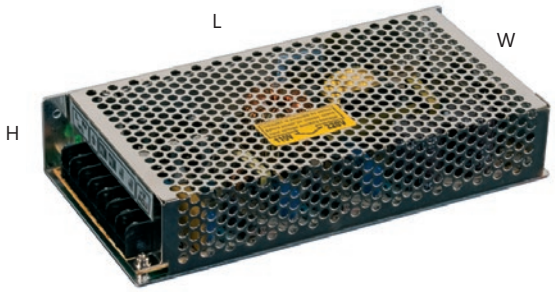

2 YEARS WARRANTY

CLASSIFICATION

IP20 | A+ | Voltage DC24V | BOX 24W 200pcs | BOX 48W 120pcs | BOX 72W 60pcs | BOX 120/180W 50pcs

SKU	Model	EQ. Watts	Dimensions L x W x H mm
87453	LED Transformer 24W	24W	85 × 58 × 34
87460	LED Transformer 48W	48W	110 × 78 × 38
10192	LED Transformer 72W	72W	159 × 99 × 42
10215	LED Transformer 120W	120W	199 × 88 × 42
84391	LED Transformer 180W	180W	199 × 98 × 42

LED POWER ADAPTER 12V
IP44

2 YEARS WARRANTY



CLASSIFICATION

IP44 | A+ | Voltage DC12V | BOX 50 pcs

SKU	Model	EQ. Watts	Dimensions L x W x H mm
14015	LED POWER ADAPTER 36W	36 W	140 × 64 × 34
14022	LED POWER ADAPTER 60W	60 W	140 × 64 × 34
14039	LED POWER ADAPTER 84W	84 W	140 × 64 × 34
14046	LED POWER ADAPTER 96W	96 W	140 × 64 × 34

CONTROLLERS FOR LED STRIPS



SKU	Model
13797	Controller for RGB 4 zone 12V 3x6A RF



SKU	Model
13803	Remote controller for RGB 4 zone 12V 3x6A RF



SKU	Model
13810	Amplifier for LED strip RGB 12V 24A



SKU	Model
13827	LED dimmer 12V 8A RF



SKU	Model
13834	LED dimm for wall 12V 16A
56466	LED dimm for wall 230V 1.3A



SKU	Model
13841	Touch controller RGB for wall 12V 4x4A



SKU	Model
13865	Touch controller RGB 12V 3x6A RF



SKU	Model
13858	Controller by bluetooth 12V 3x4A

CONTROLLERS FOR LED STRIPS



SKU	Model
13872	Controller for RGB 12V 3x8A 20 KEYS RF



SKU	Model
13889	Controller for RGB 12V 3x8A 44 KEYS RF



SKU	Model
13896	Controller 12V 3x2A with bush IR



SKU	Model
13919	Mini 44 contrloller 12V 3x2A IR




SKU	Model
13902	Mini music contrloller 12V 3x2A IR




SKU	Model
13780	Hand sensor control 12V/24V switch 5A IR

NEON LED STT DIMMABLE

230V

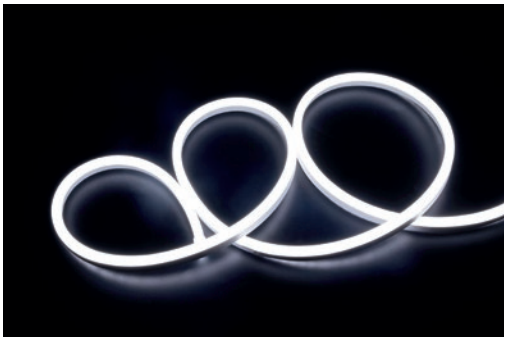




CLASSIFICATION

25000hrs | A+ | IP65 | Beam Angle 160° | Voltage AC230V | BOX 50 m

DIMENSIONS





DIMMING FUNCTION



TRIAC

SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
15807	LED NEON STT 2835 White	12	2280	2700K	8 × 16	1 m
15821	LED NEON STT 2835 White	12	2400	4500K	8 × 16	1 m
15845	LED NEON STT 2835 White	12	2520	6000K	8 × 16	1 m

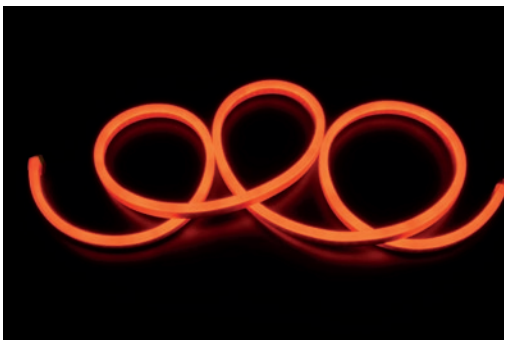

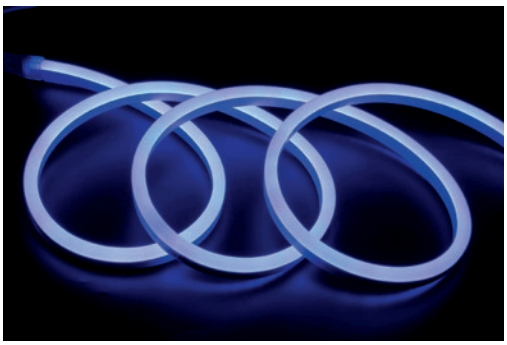

SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
15906	LED NEON STT 2835 YELLOW	12		Yellow	8 × 16	1 m
15883	LED NEON STT 2835 GREEN	12		Green	8 × 16	1 m
15869	LED NEON STT 2835 RED	12		Red	8 × 16	1 m
15920	LED NEON STT 2835 BLUE	12		Blue	8 × 16	1 m
15944	LED NEON STT 2835 PURPLE	12		Purple	8 × 16	1 m
15968	LED NEON STT 2835 RGB	12		RGB	8 × 16	1 m

NEON LED STT DIMMABLE

12V/24V

SKU	Model	W/m	lm/m	Kelvin	Dimensions	Cuttable
15982	LED NEON STT 2835 White	12	2400	4500K	8 × 16	500 mm
16002	LED NEON STT 2835 White	12	2400	4500K	8 × 16	500 mm

CLASSIFICATION

25000hrs | A+ | IP65 | Beam Angle 160° | Voltage DC12V | Voltage DC24V | BOX 50 m

ACCESSORIES FOR NEON LED STT




Plug
230V



Cap



Pin conector



Pin conector for RGB



Connector 90°



Connector 180°



Connector T-shaped



Profill

SKU	Model
29323	Plug 230V Neon LED
16057	Cap Neon LED
16071	Pin conector Neon LED
16088	Pin conector Neon LED RGB
16064	Profill 1m NEON LED
78956	Connector with cable 25cm NEON LED RGB
87286	Connector T-shaped NEON LED
87293	Connector 90° NEON LED
87309	Connector 180° NEON LED
87316	Connector 180° NEON LED RGB

LED CHIPS



5 YEARS WARRANTY

SKU	Model	lm/W	mA	Kelvin
87323	LED Chip 30-80W with holder	140	2100	3000K
87330	LED Chip 30-80W with holder	140	2100	4000K
87347	LED Chip 30-80W with holder	140	2100	5700K

LED DRIVERS

5 YEARS WARRANTY



SKU	Model	Power	mA	IP
87361	LED Driver 20W 22-36V	20W	550-600	65
87378	LED Driver 30W 22-36V	30W	850-900	65
87385	LED Driver 40W 22-36V	40W	1100	65
87392	LED Driver 50W 22-36V	50W	1300	65
87408	LED Driver 60W 22-36V	60W	1500	65
87354	LED Driver 80W 22-36V	80W	2000	65

PARK & GARDEN FIXTURES
SECTIONS


MACAO 88


MACAO 89


CHICAGO, SEATTLE 90


VENICE 91


OPAL, FUME, PRIZMATIC 92


VERONA 93


IRON 94


IRON 95


PACIFIC 96


LANTERN 97


LANTERN ACRON 97


CDP 1427, MEDINA 98


ROMA, SYDNEY, KX 1503 99


GARDENA B 100


GARDENA P 100

LED PARK FIXTURE MACAO NEW



3 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens
07994	LED Park Fixture MACAO NEW	40W	4000
08014	LED Park Fixture MACAO NEW	60W	6000

CLASSIFICATION

30000hrs | A+ | IK10 | IP66
CRI ≥80 | PF >0.9 | Voltage AC230V | Kelvin 5000K

BOX 1 pcs

DIMENSIONS



LED PARK FIXTURE MACAO HO

120 lm/W



3 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens	Kelvin
30183	LED Park Fixture MACAO HO 80W	80W	9600	4000K
30190	LED Park Fixture MACAO HO 80W	80W	9600	5700K
30169	LED Park Fixture MACAO HO100W	100W	12000	4000K
30176	LED Park Fixture MACAO HO100W	100W	12000	5700K

CLASSIFICATION

30000hrs | A+ | IK10 | IP66
CRI ≥80 | PF >0.9 | Voltage AC230V | Kelvin 4000K 5700K

BOX 1 pcs

DIMENSIONS



LED PARK FIXTURE MACAO HH



2 YEARS WARRANTY

Note: The lamp is NOT included in the price


SKU	Model	Base
30152	LED Park Fixture MACAO HH E27	E 27

CLASSIFICATION

Voltage AC230V | A+ | IK10 | IP66

BOX 1 pcs

DIMENSIONS



SFERA 400 PMMA PLUS



3 YEARS WARRANTY


SKU	Model	Base	Lamp
33450	SFERA PMMA Plus 02/50W	E27	HPS
33467	SFERA PMMA Plus 02/70W	E27	HPS
33481	SFERA PMMA Plus 03/70W	G12	MH


CLASSIFICATION

Voltage AC230V | A+ | IK10 | IP66

BOX 1 pcs

DIMENSIONS



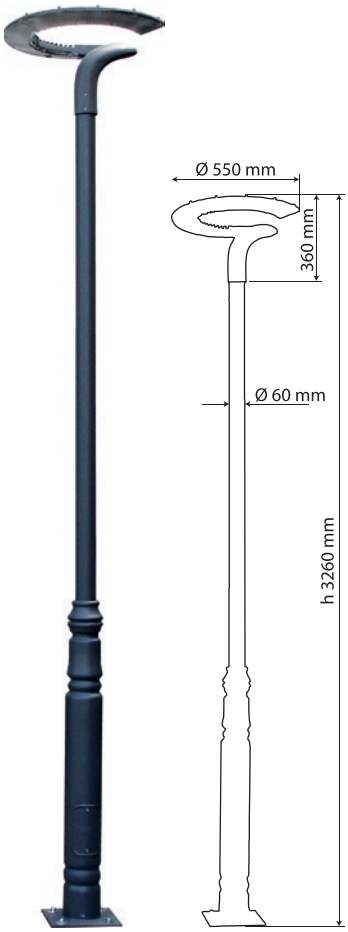

LED PARK FIXTURE CHICAGO



CLASSIFICATION

30000hrs | A+ | IK10 | IP66 | CRI ≥80 | PF >0.9 | Voltage AC230V | Kelvin 4500K


BOX 1 pcs

2 YEARS WARRANTY


SKU	Model	EQ. Watts	Lumens
30053	LED Park Fixture CHICAGO 40W Ø60mm	40W	4000
30077	POLE CHICAGO 3m Ø60mm		

LED PARK FIXTURE SEATTLE



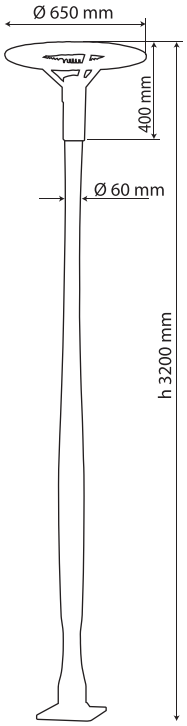



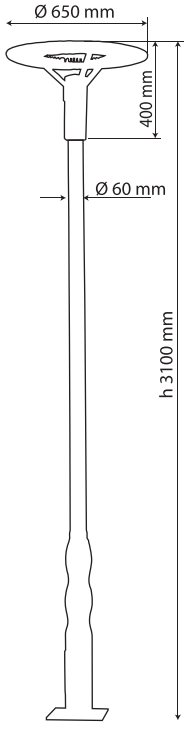

2 YEARS WARRANTY



CLASSIFICATION

30000hrs | A+ | IK10 | IP66 | CRI ≥80 | PF >0.9 | Voltage AC230V | Kelvin 4500K

BOX 1 pcs

SKU	Model	EQ. Watts	Lumens
09097	LED Park Fixture SEATTLE Ø60mm	60W	6000
30299	Pole SEATTLE 2.8m Ø60		
30305	Pole SEATTLE 2.9m Ø60		

VENICE

CLASSIFICATION

IK10 | Body Type Aluminium

Park poles Venice are made by special aluminium alloy painted in flat black. Lantern Pacific can be mounted on all poles Venice.
See page 96-97.

2 YEARS WARRANTY



SKU	Model	H mm	Color
32873	Park pole VENICE 70	700	black
32781	Park pole VENICE 130	1300	black
32811	Park pole VENICE 170	1700	black
32842	Park pole VENICE 240	2400	black
30329	VENICE arm 20		black
30336	VENICE arm 21		black
30367	VENICE arm 31		black
32774	Conector VENICE		black

OPAL

2 YEARS WARRANTY

SKU	Model	Color	BOX pcs
02661	OPAL Ø 200	opal	18 pcs
02678	OPAL Ø 250	opal	12 pcs
02685	OPAL Ø 300	opal	8 pcs
02692	OPAL Ø 400	opal	4 pcs



CLASSIFICATION

BOX Base E27 IP43

FUME

2 YEARS WARRANTY

SKU	Model	Color	BOX pcs
02708	FUME Ø 200	fume	18 pcs
02715	FUME Ø 250	fume	12 pcs
02722	FUME Ø 300	fume	8 pcs
02739	FUME Ø 400	fume	4 pcs



CLASSIFICATION

BOX Base E27 IP43

PRIZMATIC

2 YEARS WARRANTY

SKU	Model	Color	BOX pcs
03828	PRIZMATIC Ø 200	prizmatic	18 pcs
33160	PRIZMATIC Ø 250	prizmatic	12 pcs
33177	PRIZMATIC Ø 300	prizmatic	8 pcs
33184	PRIZMATIC Ø 400	prizmatic	4 pcs



CLASSIFICATION

BOX Base E27 IP43

OPAL W

2 YEARS WARRANTY

SKU	Model	Color	BOX pcs
02746	OPAL FOR WALL Ø 200	opal	12 pcs
03873	PRIZMATIC FOR WALL Ø 200	prizmatic	12 pcs



CLASSIFICATION

BOX Base E27 IP43

BASE OM

2 YEARS WARRANTY

SKU	Model	Color	BOX pcs
03880	Base OM 80	black	50 pcs
03897	Base OM 140	black	50 pcs



CLASSIFICATION

BOX Base E27 IP43

VERONA

SKU	Model	H mm	Color
04146	Garden light Verona wall	560	SIR

CLASSIFICATION

BOX pcs | Base E27 | IP44 | Body Type Aluminium + Glass



2 YEARS WARRANTY



VERONA POLE SET

2 YEARS WARRANTY

SKU	Model	Base	H mm	Color
31791	Garden light Verona set with pole	2×E27	2000	SIR

CLASSIFICATION

BOX pcs | Base E27 | IP44 | Body Type Aluminium + Glass

IRON 2079



IRON 01



IRON 03



IRON 04

2 YEARS WARRANTY

SKU	Model	Color
82526	IRON 2079 01/Wall	black
82489	IRON 2079 03/Standing	black
82502	IRON 2079 04/Hanging	black

CLASSIFICATION

Base E27 | IP44 | Body Type Iron+Glass | BOX 6 pcs

IRON 2222



2 YEARS WARRANTY

SKU	Model	Color
50310	IRON 2222 01/Wall	brown

CLASSIFICATION

Base E27 | IP44 | Body Type Iron+Glass | BOX 6 pcs

IRON 2191

2 YEARS WARRANTY



IRON 2191 01



IRON 2191 04

SKU	Model	Color
82465	IRON 2191 01/Wall	brown
82441	IRON 2191 04/Hanging	

CLASSIFICATION

Base E27 | IP44 | Body Type Iron+Glass | BOX 6 pcs

BELL

2 YEARS WARRANTY





SKU	Model	Color
05044	Garden light BELL	Old Gold
05068	Garden light BELL	Black

CLASSIFICATION

Base E27 | IP44 | Body Type Alum+Glass | BOX 6 pcs

ART

2 YEARS WARRANTY





SKU	Model	Color
10918	ART wave glass	Old Gold
10871	ART yellow glass	Old Gold

CLASSIFICATION

Base E27 | IP44 | Body Type Alum+Glass | BOX 12 pcs

PACIFIC SMALL

SKU	Model	Color	BOX pcs
10574	SMALL 01 Wall	BLACK	12
10598	SMALL 01 Wall	WHITE	12
10611	SMALL 01 Wall	OLD GOLD	12
31548	SMALL 02 Standing	BLACK	1
31029	SMALL 02 Standing	WHITE	1
31517	SMALL 02 Standing	OLD GOLD	1
31555	SMALL 03 Standing	BLACK	1
31036	SMALL 03 Standing	WHITE	1
31524	SMALL 03 Standing	OLD GOLD	1
31531	SMALL 04 Hanging	BLACK	1
31012	SMALL 04 Hanging	WHITE	1
31500	SMALL 04 Hanging	OLD GOLD	1



SMALL 01



SMALL 02



SMALL 03



SMALL 04

2 YEARS WARRANTY

CLASSIFICATION
Base E27 | Body Type Alum+Glass | IP44 | BOX pcs

PACIFIC MIDDLE

SKU	Model	Color	BOX pcs
10635	MIDDLE 01 Wall	BLACK	12
10659	MIDDLE 01 Wall	WHITE	12
04061	MIDDLE 01 Wall	OLD GOLD	12
30992	MIDDLE 02 Standing	BLACK	1
30909	MIDDLE 02 Standing	WHITE	1
30961	MIDDLE 02 Standing	OLD GOLD	1
31005	MIDDLE 03 Standing	BLACK	1
87477	MIDDLE 03 Standing	WHITE	1
30978	MIDDLE 03 Standing	OLD GOLD	1
30985	MIDDLE 04 Hanging	BLACK	1
30893	MIDDLE 04 Hanging	WHITE	1
30954	MIDDLE 04 Hanging	OLD GOLD	1



MIDDLE 01



MIDDLE 02



MIDDLE 03



MIDDLE 04

2 YEARS WARRANTY

CLASSIFICATION
Base E27 | Body Type Alum+Glass | IP44 | BOX pcs

PACIFIC BIG

SKU	Model	Color	BOX pcs
04085	BIG 01 Wall	BLACK	12
10673	BIG 01 Wall	WHITE	12
10697	BIG 01 Wall	OLD GOLD	12
30879	BIG 02 Standing	BLACK	1
30787	BIG 02 Standing	WHITE	1
30848	BIG 02 Standing	OLD GOLD	1
30886	BIG 03 Standing	BLACK	1
30794	BIG 03 Standing	WHITE	1
30855	BIG 03 Standing	OLD GOLD	1
30862	BIG 04 Hanging	BLACK	1
30770	BIG 04 Hanging	WHITE	1
30831	BIG 04 Hanging	OLD GOLD	1



BIG 01



BIG 02



BIG 03



BIG 04

2 YEARS WARRANTY

CLASSIFICATION
Base E27 | Body Type Alum+Glass | IP44 | BOX pcs


LANTERN CS

CLASSIFICATION

Base E27 | Body Type Alum+Glass | IP44 | BOX pcs

2 YEARS WARRANTY

SKU	Model	Color	BOX pcs
10772	CS 01 Wall	BLACK	6
10819	CS 01 Wall	OLD GOLD	6
30558	CS 02 Standing	BLACK	1
30527	CS 02 Standing	OLD GOLD	1
30565	CS 03 Standing	BLACK	1
30534	CS 03 Standing	OLD GOLD	1
30541	CS 04 Hanging	BLACK	1
30510	CS 04 Hanging	OLD GOLD	1









LANTERN CB

CLASSIFICATION

Base E27 | Body Type Alum+Glass | IP44 | BOX pcs

2 YEARS WARRANTY

SKU	Model	Color	BOX pcs
10710	CB 01 Wall	BLACK	4
10758	CB 01 Wall	OLD GOLD	4
30473	CB 02 Standing	BLACK	1
30459	CB 02 Standing	OLD GOLD	1
30497	CB 03 Standing	BLACK	1
30466	CB 03 Standing	OLD GOLD	1
30480	CB 04 Hanging	BLACK	1
30442	CB 04 Hanging	OLD GOLD	1









LANTERN ACORN


CLASSIFICATION

Base E27 | Body Type Alum+Glass | IP44 | BOX 12 pcs

2 YEARS WARRANTY

SKU	Model	Color
10833	ACORN Wall	BLACK
04108	ACORN Wall	OLD GOLD





LED GARDEN LIGHT CDP 1427



2 YEARS WARRANTY

SKU	Model	H mm	Color
08045	LED Garden Light CDP 1427	400	black

CLASSIFICATION

Voltage AC230V | A+ | IK08 | IP66
Base GU10 | Beam Angle 360°

LED GARDEN LIGHT MEDINA 65

2 YEARS WARRANTY

MEDINA 65 L600



MEDINA 65 L800



SKU	Model	H mm	Color
06836	LED Garden Light MEDINA 65-L600	600	inox
06843	LED Garden Light MEDINA 65-L800	800	inox

CLASSIFICATION

Voltage AC230V | A+ | IK08 | IP66
Base E27 | Beam Angle 360°

LED GARDEN LIGHT MEDINA 81

2 YEARS WARRANTY

MEDINA 81 L800



MEDINA 81 Wall



SKU	Model	H mm	Color
06867	LED Garden Light MEDINA 81-L800	800	black
06874	LED Garden Light MEDINA 81 Wall	280	black

CLASSIFICATION

Voltage AC230V | A+ | IK08 | IP66
Base E27 | Beam Angle 360°

LED GARDEN LIGHT ROMA

2 YEARS WARRANTY

ROMA 1x10 W



ROMA 2x10 W



SKU	Model	EQ.Watts	Lumens	H mm	Color
87415	LED Garden Light ROMA 1X10W	10W	1000	600	black
87491	LED Garden Light ROMA 1X10W	10W	1000	600	grey
87422	LED Garden Light ROMA 1X10W	10W	1000	800	black
87507	LED Garden Light ROMA 1X10W	10W	1000	800	grey
87439	LED Garden Light ROMA 2X10W	20W	2000	600	black
87514	LED Garden Light ROMA 2X10W	20W	2000	600	grey
87446	LED Garden Light ROMA 2X10W	20W	2000	800	black
87521	LED Garden Light ROMA 2X10W	20W	2000	800	grey

CLASSIFICATION

30000hrs | A+ | IK10 | IP66 | CRI ≥80 | PF >0.9 | Voltage AC230V | Beam Angle 120° | Kelvin 6000K

LED GARDEN LIGHT SYDNEY

2 YEARS WARRANTY



SKU	Model	EQ.Watts	Lumens	H mm	Color
14183	LED Garden Light SYDNEY	12W	1200	600	grey

CLASSIFICATION

30000hrs | A+ | IK10 | IP66 | CRI ≥80 | PF >0.9 | Voltage AC230V | Beam Angle 120° | Kelvin 3000K

LED GARDEN LIGHT KX 1503

2 YEARS WARRANTY



KX 1503 300



KX 1503 600



KX 1503 900

SKU	Model	H mm	Color
75351	LED Garden Light KX 1503	300	black
75375	LED Garden Light KX 1503	600	black
75399	LED Garden Light KX 1503	900	black

CLASSIFICATION

Voltage AC230V | A+ | IK10 | IP66 | Beam Angle 360° | Base E27

LED GARDEN LIGHT GARDENA B 9075



GARDENA B 18W



GARDENA B 12W



GARDENA B 7W

2 YEARS WARRANTY

SKU	Model	EQ.Watts	Lumens	Kelvin	Dimensions mm	Color	pcs BOX
10079	GARDENA B 9075	5 W	500	6000K	Ø100x150	black	50
10093	GARDENA B 9075	7 W	700	6000K	Ø140x170	black	30
10116	GARDENA B 9075	12 W	1200	6000K	Ø140x170	black	30
10130	GARDENA B 9075	18 W	1800	6000K	Ø160x170	black	20
10956	GARDENA B 9075 RGB	3 W	300	RGB	Ø70x137	black	50
10970	GARDENA B 9075 RGB	6 W	600	RGB	Ø70x137	black	30
10994	GARDENA B 9075 RGB	9 W	900	RGB	Ø140x170	black	20

CLASSIFICATION

30000hrs | A+ | IK08 | IP66 | CRI ≥80 | PF >0.9 | Voltage AC230V | Beam Angle 60° | BOX pcs | Kelvin 6000K | Kelvin RGB

LED GARDEN LIGHT GARDENA P 9075



GARDENA P 7W



GARDENA P 5W

2 YEARS WARRANTY

SKU	Model	EQ.Watts	Lumens	Kelvin	Dimensions mm	Color	pcs BOX
10154	GARDENA P 9075	5 W	500	6000K	Ø70x137	black	50
10178	GARDENA P 9075	7 W	700	6000K	Ø100x150	black	30
11014	GARDENA P 9075 RGB	3 W	300	RGB	Ø70x137	black	50
11038	GARDENA P 9075 RGB	6 W	600	RGB	Ø100x150	black	30
11052	GARDENA P 9075 RGB	9 W	900	RGB	Ø100x150	black	20

CLASSIFICATION

30000hrs | A+ | IK08 | IP66 | CRI ≥80 | PF >0.9 | Voltage AC230V | Beam Angle 60° | BOX pcs | Kelvin 6000K | Kelvin RGB

SENSORS



Sensor 180° OM



Sensor 360° OM



Sensor 360° VG

SKU	Model
83608	Sensor 180° OM
83585	Sensor 360° OM
83622	Sensor 360° VG

2 YEARS WARRANTY

CLASSIFICATION

IP44 BOX pcs

Rated Load:
max 800W resistive load(110-130V/AC)
1200W resistive load (220-240V/AC)

Time Delay:
10sec ± 5sec to 7min ± 2min (adjustable)

Ambient Light:
<3LUX~2000LUX (adjustable)

Detection Motion Speed: 0.6-1.5m/s

2R LIGHT REMOTE



Light remote N1



Light remote Y-i 4E

SKU	Model	Model
82380	Light remote N1	1 x 1000W / 1 x 72W LED / 1 x 150W CFL
82427	Light remote Y-i 4E	4 x 1000W / 4 x 100W LED / 4 x 200W CFL

2 YEARS WARRANTY

CLASSIFICATION

IP43 BOX pcs

BASE E27, E40, PL-L



SKU	Model
73951	E27
74026	E40
73784	2G11
16859	GU 10

2 YEARS WARRANTY

CLASSIFICATION

IP44 BOX pcs

LED KILL PEST 2 X 2W



2 YEARS WARRANTY

Note: garrantee for tubes is 1 year

SKU	Model	Voltage
00049	LED KILL PEST 2 x 2W	AC 230V / 50Hz
37724	LED Lamp for KILL PEST 2W	

CLASSIFICATION

Voltage AC230V | IP20 | Body Type Aluminium + PS | BOX KILL PEST 8 pcs

KILL PEST 2 X 6W



2 YEARS WARRANTY

Note: garrantee for tubes is 1 year

SKU	Model	Voltage
37731	KILL PEST 2 x 6W	AC 230V / 50Hz
00063	Lamp for KILL PEST 6W	

CLASSIFICATION

Voltage AC230V | IP20 | Body Type Aluminium + PS | BOX KILL PEST 12 pcs

KILL PEST 2 X 15W



2 YEARS WARRANTY

Note: garrantee for tubes is 1 year

SKU	Model	Voltage
00001	KILL PEST 2 x 15W	AC 230V / 50Hz
00070	Lamp for KILL PEST 15W	

CLASSIFICATION

Voltage AC230V | IP20 | Body Type Aluminium + PS | BOX KILL PEST 8 pcs

KILL PEST 2 X 20W



2 YEARS WARRANTY

Note: garrantee for tubes is 1 year

SKU	Model	Voltage
00025	KILL PEST 2 x 20W	AC 230V / 50Hz
00087	Lamp for KILL PEST 20W	

CLASSIFICATION

Voltage AC230V | IP20 | Body Type Aluminium + PS | BOX KILL PEST 8 pcs


STREET POLE
SECTIONS




OCLYTE®

OCTAGONAL HOT GALVANIZED POLES

OCLYTE® pole 12 z FL 424

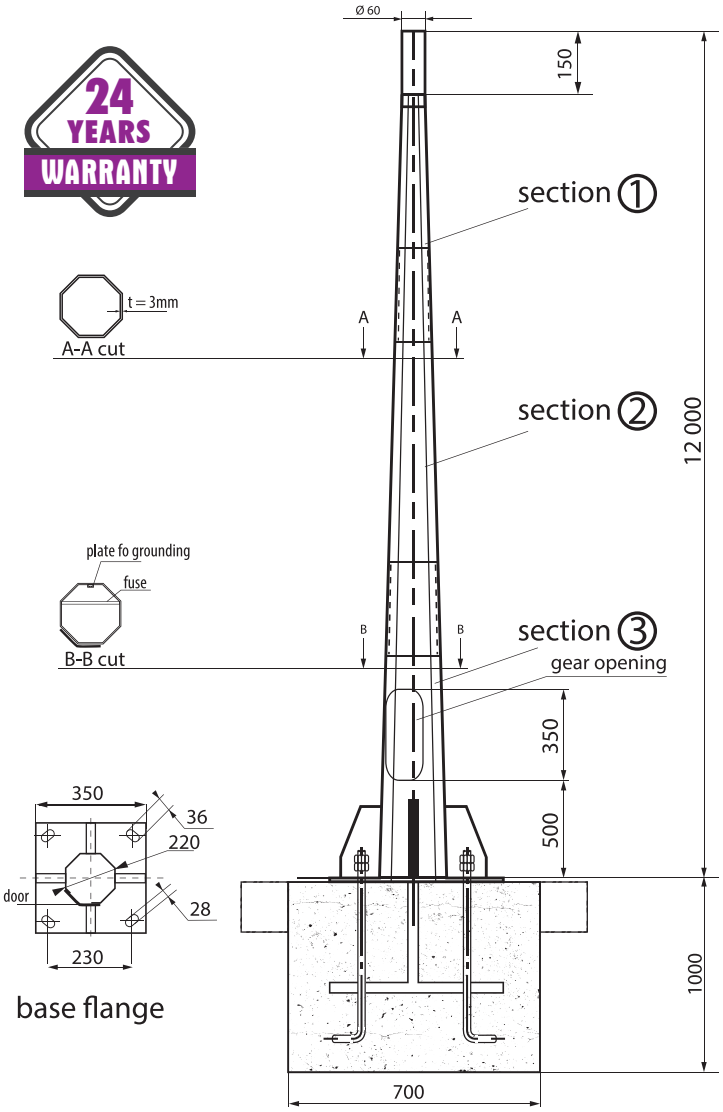

OCLYTE® pole 12 z VK 1,5

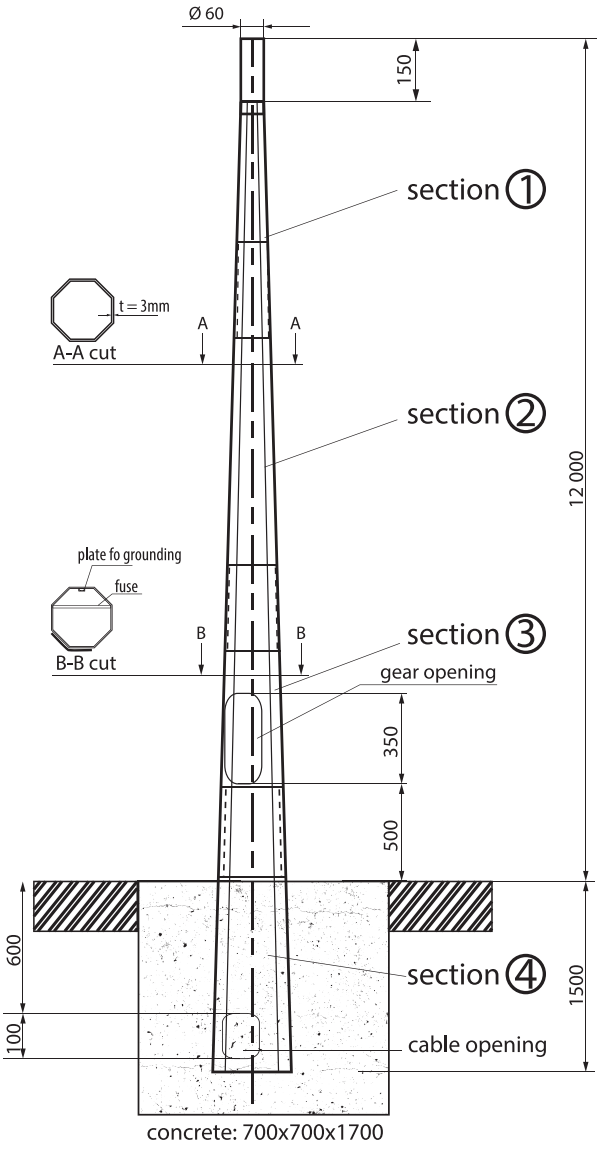

What is OCLYTE®?


OCLYTE® Poles are octagonal hot galvanized metal poles suitable for mounting of street lighting, park lighting or floodlights.
OCLYTE® are made of elements with maximum length of 4 meters, as each one is connected to the other with friction - fit. In that way you provide the needed height.

Protection covering of OCLYTE®:

Hot galvanizing is with thickness of Zinc cover 70 m and corrosion free warranty for 24 years. It provide full protection from corrosion for a period from 20 to 30 years according to the conditions on which they are exposed. This coverage do not need any maintenance during the whole period of pole usage.
Painting. Anticorrosive alkyd paint with a matt finish.
It provides anticorrosive for a couple of years ahead. Repainting of the pole is needed after 4-5 years.

Mounting instructions for poles OCLYTE® series:

1. Put the main part towards hard supporting base. Use soft pads on its surface (if there is no flange). Start hitting with soft hummer the second part to the first. Soft hummer is needed to avoid flatting of the walls of the pole.
2. During assembly, the parts should be agitated to facilitate atching. This can be achieved by slightly knocking on the place of fitting.
3. Be sure that the fitting of the parts is around 200-300mm.
4. Use the same way assembling the next pieces.
5. The arm should be placed on the top of the pole on pipe with diameter Ø 60mm and after pointing to the right direction the two bolts should be fastened.

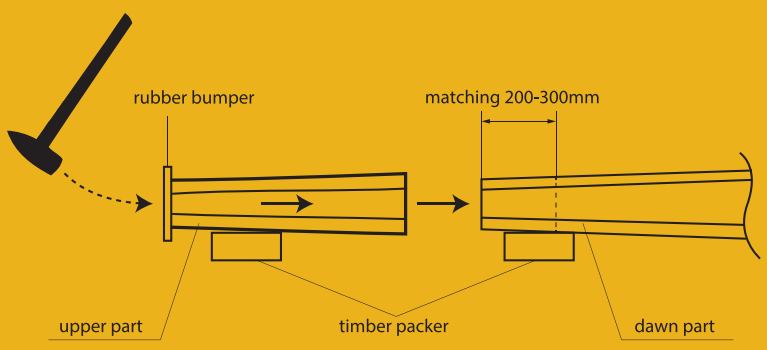

Product name of OCLYTE® poles:

The product name of the pole contains its technical information.

OCLYTE® 12 Z FL 424

Height	Finish covering	Way of mounting	Indicates
3 - 15 m	*Z - Zink* *G - Paint*	*FL - Flange VK* *VK - Ground planted*	*Model of anchors - 4xM24* *Planting depth m - 1.5*

OCLYTE® z FL Poles with Flange

Technical features of OCLYTE® - Poles with Flange
The pole with flange should be mounted with anchors. You can see the main sizes in the chart. The anchors are delivered together with pole.

Model	Height/m	Number of pcs./n	Thickness/mm	Weight/kg	Size upper/ lower part/mm	Concrete base for fixing/mm	Flange size	Anchors	Protection finish
2R Oclyte 4 Z FL 412	4	1	2	23	120/60	600×600×700	250x250x8	4xM12	hot zinc
2R Oclyte 5 Z FL 412	5	2	3	33	130/60	600×600×700	250x250x8	4xM12	hot zinc
2R Oclyte 6 Z FL 412	6	2	3	45	140/60	600×600×700	250x250x12	4xM12	hot zinc
2R Oclyte 7 Z FL 416	7	2	3	56	160/60	600×600×800	250x250x12	4xM16	hot zinc
2R Oclyte 8 Z FL 416	8	2	3	67	170/60	600×600×800	250x250x12	4xM16	hot zinc
2R Oclyte 9 Z FL 422	9	2	3	88	180/60	600×600×1000	250x250x16	4xM22	hot zinc
2R Oclyte 10 Z FL 422	10	3	3	100	190/60	600×600×1000	250x250x16	4xM22	hot zinc
2R Oclyte 11 Z FL 424	11	3	3	112	200/60	600×600×1000	250x250x16	4xM24	hot zinc
2R Oclyte 12 Z FL 424	12	3	3	126	210/60	600×600×1000	250x250x16	4xM24	hot zinc
2R Oclyte 13 Z FL 424	13	4	3	148	220/60	600×600×1000	250x250x16	4xM24	hot zinc
2R Oclyte 14 Z FL 424	14	4	3	159	230/60	600×600×1000	250x250x16	4xM24	hot zinc
2R Oclyte 15 Z FL 424	15	4	3	175	240/60	600×600×1000	250x250x16	4xM24	hot zinc

OCLYTE® z VK Poles Ground Planted

Technical features of OCLYTE® - Poles ground planted
The poles should be planted in the depths pointed in the chart. You can see the main sizes in the chart.

Model	Height/m	Number of pcs./n	Thickness/mm	Weight/kg	Size upper/ lower part/mm	Concrete base for fixing/mm	planting depth / m	Protection finish
2R Oclyte 4 Z VK 1	4	2	3	29	120/60	600×600×1050	1	hot zinc
2R Oclyte 5 Z VK 1	5	2	3	37	130/60	600×600×1050	1	hot zinc
2R Oclyte 6 Z VK 1	6	2	3	47	140/60	600×600×1050	1	hot zinc
2R Oclyte 7 Z VK 1	7	2	3	58	160/60	600×600×1050	1	hot zinc
2R Oclyte 8 Z VK 1	8	3	3	72	170/60	600×600×1050	1	hot zinc
2R Oclyte 9 Z VK 1	9	3	3	85	180/60	700×700×1050	1	hot zinc
2R Oclyte 10 Z VK 1	10	3	3	96	190/60	700×700×1050	1	hot zinc
2R Oclyte 11 Z VK 1	11	3	3	111	210/60	700×700×1050	1	hot zinc
2R Oclyte 12 Z VK 1.5	12	4	3	141	220/60	700×700×1050	1.5	hot zinc
2R Oclyte 13 Z VK 1.5	13	4	3	158	230/60	700×700×1050	1.5	hot zinc
2R Oclyte 14 Z VK 1.5	14	4	3	175	240/60	700×700×1050	1.5	hot zinc
2R Oclyte 15 Z VK 2	15	4	3	175	260/60	700×700×2050	2	hot zinc

Standards: The octagonal poles from model OCLYTE® are manufactured in compliance with Bulgarian and European standards:


- EN 40-1
- EN 40-2
- EN 40-3-1
- EN 40-3-2
- EN 40-3-3
- EN 40-5
- EN ISO 1461
- EN 288-1
- EN 288-2
- EN 288-3
- EN 288-8
- EN 571-1
- EN 970
- EN 12767

OCLYTE™ 2R® OCTAGONAL POLE

For questions and orders:

ICON TECHNOLOGY KFT.
1152 BUDAPEST, SZENTMIHÁLYI ÚT 171.
+36 1 501 3450 • info@nvc-ce.com

ASK FOR A FREE TECHNICAL SURVEY OF OUR EXPERT COLLEAGUE AND OUR PROJECT-SPECIFIC INDIVIDUAL PRICE OFFER!

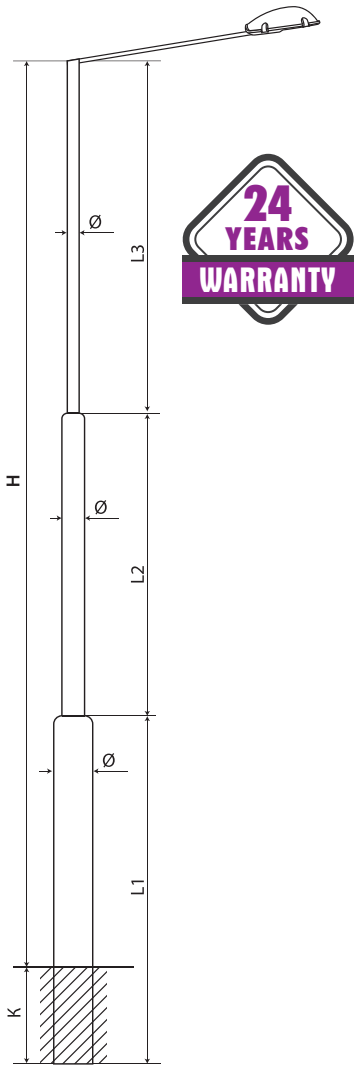

STS® tubular poles

The STS® tubular poles can be:

- made by the specification below without underground part (burring) with mounted flange on the pole and anchors.
- painted or hot galvanized with thickness of the covering finish min 75 micron and warranty against corrosion 24 years.

The STS® poles complies with the following EU standards: EN 40-1, EN 40-2, EN 40-3-1, EN 40-3-2, EN 40-3-3, EN 40-5, ISO 1461.

We can produce arms can be connected to the poles – single, double, triple, quadruple, arms for floodlights etc.

Production time: 5-10 working days for painted and 12-15 working days for hot galvanized poles.

There is possibility to be produced all kind of poles according to customers request and drawings.

Length above the ground	Total length L	burring K	step 1 L1	step 2 L2	step 3 L3
H = 4 m	5 m	1 m	Ø 108	Ø 89	-
H = 4 m	5 m	1 m	Ø 108	Ø 89	Ø 60
H = 5 m	6 m	1 m	Ø 108	Ø 89	-
H = 5 m	6 m	1 m	Ø 108	Ø 89	Ø 60
H = 6 m	7 m	1 m	Ø 108	Ø 89	-
H = 6 m	7 m	1 m	Ø 108	Ø 89	Ø 60
H = 7 m	8 m	1 m	Ø 108	Ø 89	Ø 60
H = 7 m	8 m	1 m	Ø 133	Ø 108	Ø 89
H = 7 m	8 m	1 m	Ø 159	Ø 133	Ø 89
H = 8 m	9.5 m	1.5 m	Ø 133	Ø 108	Ø 89
H = 8 m	9.5 m	1.5 m	Ø 159	Ø 133	Ø 89
H = 9 m	10.5 m	1.5 m	Ø 133	Ø 108	Ø 89
H = 9 m	10.5 m	1.5 m	Ø 159	Ø 133	Ø 89
H = 10 m	11.5 m	1.5 m	Ø 133	Ø 108	Ø 89
H = 10 m	11.5 m	1.5 m	Ø 159	Ø 133	Ø 89
H = 11 m	12.5 m	1.5 m	Ø 133	Ø 108	Ø 89
H = 11 m	12.5 m	1.5 m	Ø 159	Ø 133	Ø 89
H = 12 m	12.5 m	1.5 m	Ø 133	Ø 108	Ø 89
H = 12 m	13,5 m	1,5 m	Ø 159	Ø 133	Ø 89


RD 30 PH



RD 30 ZN


RD 301


RD 302


PDØ60/Ø40 adapter


PR Adjustable adapter



Arm for wall

SKU	Model	Finish
48157	**2R** RD 30 PH	Powder coated
48188	**2R** RD 30 ZN	Galvanized

Arm for pole

SKU	Model	Finish
48287	**2R** RD 301 PH	Powder coated
48300	**2R** RD 301 ZN	Galvanized
48324	**2R** RD 302 PH	Powder coated
48355	**2R** RD 302 ZN	Galvanized

Adapter Ø60/Ø40

SKU	Model	Finish
48133	**2R** PD adapter Ø60/Ø40	Powder coated

Adjustable adapter

SKU	Model	Finish
48119	**2R** PR adapter Ø60/Ø40	Powder coated Galvanized
48126	**2R** PR adapter Ø60/Ø60	Powder coated Galvanized

LED AUTO LIGHTS
SECTIONS


LED WORK LAMP 108


LED WORK LAMP 108


LED WORK LAMP 98


LED WORK LAMP 109


LED WORK LAMP 109


LED BAR LBL C 110


LED BAR LBL CS 111


LED BAR LBL SLIM 112


LED BAR LBL CURVED 113


LED BAR LBL 5D 113


LED FOGLIGHTS 114


CABLE FOR LED AUTO 114

GALAXY

LED Offroad Lights


GALAXY WL 027 R


GALAXY WL 027 S

WL 027R 27W
WL 027S 27W

2 YEARS WARRANTY

CLASSIFICATION
50000hrs | A+ | Voltage DC12V | IP67 | Kelvin 6000K | Spot Beam

SKU	Model	EQ.Watts	Lumens	Dimensions mm
11861	GALAXY WL 027R 27W	27 W	2025	Ø 114 × 125 × 45
11823	GALAXY WL 027S 27W	27 W	2025	105 × 114 × 40


GALAXY WL 042 R


GALAXY WL 048 S

WL 042R 42W
WL 048S 48W

2 YEARS WARRANTY

CLASSIFICATION
50000hrs | A+ | Voltage DC12V | IP67 | Kelvin 6000K | Spot Beam

SKU	Model	EQ.Watts	Lumens	Dimensions mm
11885	GALAXY WL 042R 42W	42 W	3150	Ø 114 × 125 × 45
11847	GALAXY WL 048S 48W	48 W	3600	105 × 114 × 40



WL N010 10W

2 YEARS WARRANTY

CLASSIFICATION
50000hrs | A+ | Voltage DC12V | IP67 | Kelvin 6000K | Spot Beam

SKU	Model	EQ.Watts	Lumens	Dimensions mm
11946	GALAXY WL N010 10W	10 W	750	50 × 80 × 50



MINI 18W

2 YEARS WARRANTY

CLASSIFICATION
50000hrs | A+ | Voltage DC12/24V | IP67 | Kelvin 6000K | Spot Beam

SKU	Model	EQ.Watts	Lumens	Dimensions mm
11908	GALAXY MINI 18W	18 W	1350	150 × 35 × 50



MINI VG 18W

2 YEARS WARRANTY

CLASSIFICATION
50000hrs | A+ | Voltage DC12V | IP67 | Kelvin 6000K | Spot Beam

SKU	Model	EQ.Watts	Lumens	Dimensions mm
11922	GALAXY MINI VG 18W	18 W	1350	185 × 40 × 35



WL VG 18W

2 YEARS WARRANTY

CLASSIFICATION
50000hrs | A+ | Voltage DC12V | IP67 | Kelvin 6000K | Spot Beam

SKU	Model	EQ.Watts	Lumens	Dimensions mm
11960	GALAXY WL VG 18W	18 W	1350	120 × 90 × 60

WL 080S 80W



2 YEARS WARRANTY

SKU	Model	EQ.Watts	Lumens	Dimensions mm
13513	GALAXY WL 080S 80W	80 W	6000	105 × 105 × 40

CLASSIFICATION



WL 7" 105R 15W



2 YEARS WARRANTY

SKU	Model	EQ.Watts	Lumens	Dimensions mm
83202	GALAXY WL 7" 105R 15W	15 W	1200	Ø 170 × 70

CLASSIFICATION



WL 9" 185R 60W



2 YEARS WARRANTY

SKU	Model	EQ.Watts	Lumens	Dimensions mm
83226	GALAXY WL 9" 185R 60W	60 W	4800	Ø 220 × 90

CLASSIFICATION



RING FOR GALAXY WL 105R / 185R



Ring for GALAXY WL 185R 220 mm




Ring for GALAXY WL 105R 170 mm

SKU	Model	Dimensions mm
87538	Ring for GALAXY WL 105R black	Ø 170
87545	Ring for GALAXY WL 105R white	Ø 170
87552	Ring for GALAXY WL 185R black	Ø 220
87569	Ring for GALAXY WL 185R white	Ø 220

2 YEARS WARRANTY

LED BAR LBL C

CLASSIFICATION





LBL C 54W



LBL C 36W



LBL C 18W



LBL C 126W



LBL C 108W



LBL C 72W



LBL C 288W



LBL C 234W




LBL C 180W



SKU	Model	EQ.Watts	Lumens	Beam Angle	Dimensions mm
11984	GALAXY LBL C 18W	18 W	1350	flood	70 × 97 × 64
12004	GALAXY LBL C 36W	36 W	2700	flood	70 × 165 × 64
12028	GALAXY LBL C 54W	54 W	4050	flood	70 × 232 × 64
12042	GALAXY LBL C 72W	72 W	5400	flood	70 × 300 × 64
12066	GALAXY LBL C 108W	108 W	8100	combo	70 × 437 × 64
12080	GALAXY LBL C 126W	126 W	9450	combo	70 × 500 × 70
12103	GALAXY LBL C 180W	180 W	13500	combo	70 × 710 × 64
12127	GALAXY LBL C 234W	234 W	17550	combo	70 × 910 × 64
12141	GALAXY LBL C 288W	288 W	21600	combo	70 × 1115 × 64

LED BAR LBL CS

CLASSIFICATION




LBL CS 300W


LBL CS 240W


LBL CS 180W


LBL CS 120W


LBL CS 72W

2 YEARS WARRANTY


LBL CS 36W

SKU	Model	EQ.Watts	Lumens	Beam Angle	Dimensions mm
12844	GALAXY LBL CS 36W	36 W	3600	flood	190×73×73
12868	GALAXY LBL CS 72W	72 W	7200	flood	345×73×73
12882	GALAXY LBL CS 120W	120 W	12000	flood	550×73×73
12905	GALAXY LBL CS 180W	180 W	18000	combo	800×73×73
12929	GALAXY LBL CS 240W	240 W	24000	combo	1060×73×73
12943	GALAXY LBL CS 300W	300 W	30000	combo	1310×73×73

LED BAR LBL SLIM

CLASSIFICATION

30000hrs | A+ | Voltage DC12V | IP67 | Kelvin 6000K | Spot Beam | Combo Beam


LBL Slim 18W

2 YEARS WARRANTY


LBL Slim 36W


LBL Slim 54W


LBL Slim 72W


LBL Slim 90W

SKU	Model	EQ.Watts	Lumens	Beam Angle	Dimensions mm
13346	GALAXY LBL Slim 18W	18 W	1350	spot	185×30×45
13360	GALAXY LBL Slim 36W	36 W	2700	spot	345×30×45
13384	GALAXY LBL Slim 54W	54 W	4050	spot	550×30×45
13407	GALAXY LBL Slim 72W	72 W	5400	combo	660×30×45
13421	GALAXY LBL Slim 90W	90 W	6750	combo	820×30×45
13445	GALAXY LBL Slim 108W	108 W	8100	combo	955×30×45
13469	GALAXY LBL Slim 126W	126 W	9450	combo	1100×30×45
13483	GALAXY LBL Slim 144W	144 W	10800	combo	1310×30×45

LED BAR CURVED



LBL Curved 120W

LBL Curved 180W

2 YEARS WARRANTY

SKU	Model	EQ.Watts	Lumens	Beam Angle	Dimensions mm
13186	GALAXY LBL Curved 120W	120 W	9000	combo	550×82×85
13209	GALAXY LBL Curved 180W	180 W	13500	combo	800×82×85
13223	GALAXY LBL Curved 240W	240 W	18000	combo	1050×82×85
13247	GALAXY LBL Curved 288W	288 W	21600	combo	1300×82×85
13261	GALAXY LBL Curved 300W	300 W	22500	combo	1335×82×85


CLASSIFICATION

30000hrs | A+ | Voltage DC12V | IP67 | Kelvin 6000K | Combo Beam

LED BAR LBL 5D

LBL 5D 30W



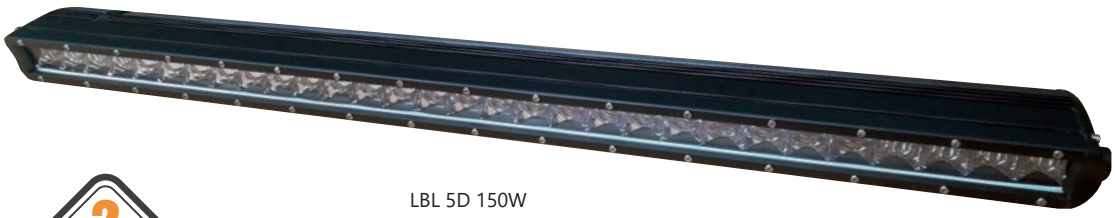

LBL 5D 150W

2 YEARS WARRANTY

SKU	Model	EQ.Watts	Lumens	Beam Angle	Dimensions mm
13285	GALAXY LBL 5D 30W	30 W	2250	spot	190×42×80
13308	GALAXY LBL 5D 150W	150 W	11250	combo	770×42×80
13322	GALAXY LBL 5D 250W	250 W	18750	combo	1260×42×80

CLASSIFICATION

30000hrs | A+ | Voltage DC12V | IP67 | Kelvin 6000K | Combo Beam

LED FOGLIGHTS
HL 4" 18W

2 YEARS WARRANTY



SKU	Model	EQ.Watts	Lumens	Beam Angle	Dimensions mm
48652	GALAXY HL 4" 18W	18 W	1350	combo	Ø 102

CLASSIFICATION

30000hrs | A+ | Voltage DC12V | IP67 | Kelvin 6000K

Combo Beam

CABLE FOR LED AUTO



2 YEARS WARRANTY


SKU	Model
12974	KIT 1 cable for 1 light
12998	KIT 1 cable for 2 lights

CLASSIFICATION

Voltage DC12V | IP67


SWITCH FOR 1 LIGHT

The relay must comply with the installation voltage, of the vehicle 12V



SWITCH FOR 2 LIGHTS


The relay must comply with the installation voltage, of the vehicle 12V



DEFINITION OF INGRESS PROTECTION (IP)

First digit (Protection against solid objects)		Second digit (Protection against liquids)	
	Meaning		**Meaning**
0	No protection	0	No protection
1	Protected against solid objects up to 50 mm (hands)	1	Protection against vertically falling drops of water
2	Protected against solid objects up to 12 mm (fingers)	2	Protection against direct sprays of water up to 15° from the vertical
3	Protected against solid objects over 2.5 mm (tool)	3	Water falling as a spray at any angle up to 60° from the vertical shall have no harmful effect
4	Protected against solid objects over 1 mm (wire)	4	Protection against water sprayed from all directions
5	Protected against dust limited ingress	5	Protected against low pressure water jets from any direction
6	Totally protected against dust	6	Protected against high pressure water jets
		7	Protected against the effect of immersion
		8	Protects against long periods of immersion under pressure

LUMINOUS FLUX Ø

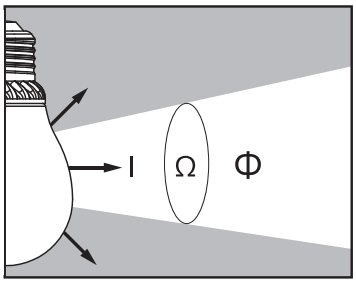

Unit of measurement: **lumen [lm]**. Luminous flux F is all the radiated power emitted by a light source evaluated with the spectral sensitivity of the eye and the photometric radiation equivalent km.

Luminaus flux ø Luminaus intensity I is a measura of the luminous flux Ω emitted in solid angle Φ

CRI


CRI > 80



CRI < 70

Color Rendering Index (CRI) is the measurement of how colors look under a light source when compared with sunlight. The index is measured from 0-100, with a perfect 100 indicating that colors under the light source appear the same as they would under natural sunlight.

PF

Power Factor (PF) of LED Lighting. Power factor indicates the ratio of realpower (Watts used by the load) to apparent power (voltage x current drawn into the circuit). A low power factor therefore indicates an inefficient product as it draws more current into the circuit than is utilised by the load.

COLOR TEMPERATURE IN KELVINS (K)

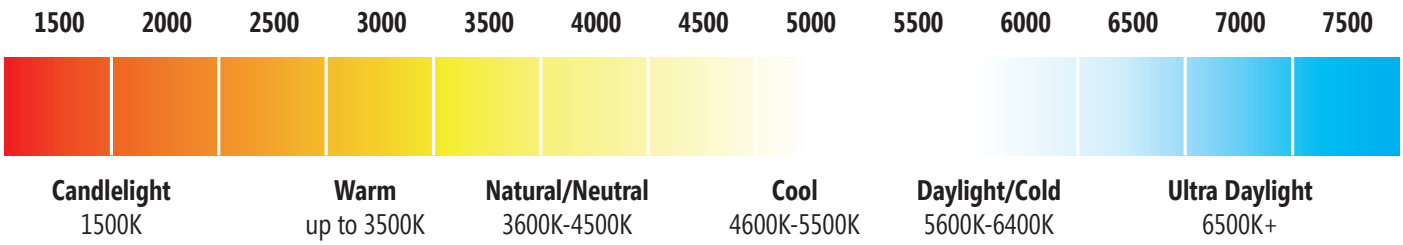

10 years on the market

www.mystock.hu

ICON TECHNOLOGY Kft.
H-1152 Budapest
Szentmihályi út 171.
tel: +36 1 501 3450
info@nvc-ce.com

2R® LED LIGHTING SYSTEMS

nVC Lighting

OCLYTE™ 2R® OCTAGONAL POLE

GALAXY